


## BH & BI series

- Meets or Exceeds Industry Seating Standards (BH When Heat Treated)
- Office Chairs
- Machine Stands
- Displays
- Upholstered Furniture

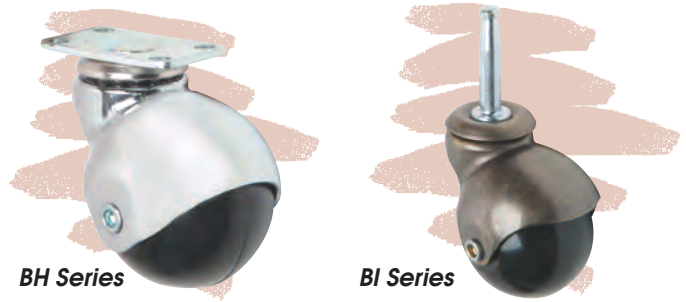

### "BH" and "BI" Series Hooded Ball Casters for Office Furniture and Equipment, Medical Equipment and Store Fixtures

Wheel diameter Inch / (mm)	Tread Width Inch / (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Overall Height <sup>1</sup> (Reference Only)	Wheel Color	Wheel Material	Caster Finish	Mounting Options <sup>3</sup>	Part Numbers
1-1/2" <sup>4</sup> (38mm)	1-1/2" (38mm)	50 lbs. (22 Kg.)	2- 2/16" (53mm)	Black	Solid Hard Plastic	Chrome	A-Grip Neck Stem (5/16" X 1-9/16")	BI038UBLCA60XXX
						Antique	D-Friction Ring Stem (7/16" X 1-3/8")	BI038UBLED22XXX
						English	D-Friction Ring Stem (7/16" X 1-3/8")	BI038UBLCD22XXX
						Chrome	D-Friction Ring Stem (7/16" X 1-3/8")	BI038UBLCD22XXX
See Icons below for options								
2" (50mm)	2" (50mm)	75 lbs. (34 Kg.)	2-1/2" (63mm)	Black	Black Vinyl	Chrome	A-Grip Neck Stem (5/16" X 1-9/16")	BH050UBLCA60XXX
						Brass	A-Grip Neck Stem (5/16" X 1-9/16")	BH050UBLBA60XXX
						Antique	A-Grip Neck Stem (5/16" X 1-9/16")	BH050UBLEA60XXX
						English	A-Grip Neck Stem (5/16" X 1-9/16")	BH050UBLEA60XXX
						Chrome	D-Friction Ring Stem (7/16" X 1-3/8")	BH050UBLCD22XXX
						Brass	D-Friction Ring Stem (7/16" X 1-3/8")	BH050UBLBD22XXX
						Antique	D-Friction Ring Stem (7/16" X 1-3/8")	BH050UBLED22XXX
						English	D-Friction Ring Stem (7/16" X 1-3/8")	BH050UBLED22XXX
						Chrome	C-Plate (1-3/16" X 2")	BH050UBLCTPCXXX
						Brass	C-Plate (1-3/16" X 2")	BH050UBLBTPCXXX
Antique	C-Plate (1-3/16" X 2")	BH050UBLETPCXXX						
English	C-Plate (1-3/16" X 2")	BH050UBLETPCXXX						
See Icons below for options								
2" (50mm)	2" (50mm)	75 lbs. 34 Kg.)	2-1/2" (63mm)	Black	HCST Black Rubber	Chrome	A-Grip Neck Stem (5/16" X 1-9/16")	BH0502BLCA60XXX
						Brass	A-Grip Neck Stem (5/16" X 1-9/16")	BH0502BLBA60XXX
						Antique	A-Grip Neck Stem (5/16" X 1-9/16")	BH0502BLEA60XXX
						English	A-Grip Neck Stem (5/16" X 1-9/16")	BH0502BLEA60XXX
						Chrome	D-Friction Ring Stem (7/16" X 1-3/8")	BH0502BLCD22XXX
						Brass	D-Friction Ring Stem (7/16" X 1-3/8")	BH0502BLBD22XXX
						Antique	D-Friction Ring Stem (7/16" X 1-3/8")	BH0502BLED22XXX
						English	D-Friction Ring Stem (7/16" X 1-3/8")	BH0502BLED22XXX
						Chrome	C-Plate (1-3/16" X 2")	BH0502BLCTPCXXX
						Brass	C-Plate (1-3/16" X 2")	BH0502BLBTPCXXX
Antique	C-Plate (1-3/16" X 2")	BH0502BLETPCXXX						
English	C-Plate (1-3/16" X 2")	BH0502BLETPCXXX						
See Icons below for options								

Additional finishes are available - Contact factory for details

Additional mounting options and lengths are available - Contact factory for specifications

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.

2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.

3. Please refer to pages 37 & 40 for specific lengths and mounting options.

4. The 1-1/2" version is not heat treated and would require testing under load to determine fitness for use. (Light duty applications only)

**TN series**

- Meets or Exceeds Industry Seating Standards (2" & 2-1/2" only)
- Furniture
- Displays
- Office Equipment



**"TN" Series Nylon Hooded Twin Swivel Casters**

Wheel diameter Inch / (mm)	Caster Width Inch / (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers
1-3/8" (35mm)	1-7/16" (36.5mm)	35 lbs. (15 Kg.)	Black	Black	Nylon	1-3/4" (44mm)	A-Grip Neck Stem (5/16" X 1-9/16")	TN035ABLXA70XXX
						1-3/4" (44mm)	G-Friction Ring Stem (3/8" X 1")	TN035ABLXG16XXX
						1-3/4" (44mm)	K-Threaded Stem (3/8" - 16 - 1")	TN035ABLXK16XXX
						1-7/8" (47mm)	M-Threaded Stem (5/16" - 18 - 3/4")	TN035ABLXM12XXX
						1-7/8" (47mm)	A-Plate (1-1/4" X 1-5/8")	TN035ABLXTPAXXX
						1-7/8" (47mm)	N Plate (1-1/2" X 1-1/2")	TN035ABLXTPNXXX
See Icons below for options								
1-5/8" (41mm)	1-9/16" (40mm)	40 lbs. (18 Kg.)	Black	Black	Nylon	1-15/16" (49mm)	A-Grip Neck Stem (5/16" X 1-9/16")	TN040ABLXA70XXX
						1-15/16" (49mm)	D-Friction Ring Stem (7/16" X 1-3/8")	TN040ABLXD22XXX
						1-15/16" (49mm)	G-Friction Ring Stem (3/8" X 1")	TN040ABLXG16XXX
						1-15/16" (49mm)	K-Threaded Stem (3/8" - 16 - 1")	TN040ABLXK16XXX
						1-15/16" (49mm)	M-Threaded Stem (5/16" - 18 - 3/4")	TN040ABLXM12XXX
						2-1/4" (57mm)	A-Plate (1-1/4" X 1-5/8")	TN040ABLXTPAXXX
						2-1/4" (57mm)	B-Plate (1-1/2" X 2-1/8")	TN040ABLXTPBXXX
						2-1/4" (57mm)	C-Plate (1-3/16" X 2")	TN040ABLXTPCXXX
2-1/4" (57mm)	N Plate (1-1/2" X 1-1/2")	TN040ABLXTPNXXX						
See Icons below for options								
2" (50mm)	1-13/16" (46mm)	75 lbs. (34 kg)	Black	Black	Nylon	2-7/16" (62mm)	A-Grip Neck Stem (5/16" X 1-9/16")	TN050ABLXA70XXX
						2-7/16" (62mm)	D-Friction Ring Stem (7/16" X 1-3/8")	TN050ABLXD22XXX
						2-7/16" (62mm)	G-Friction Ring Stem (3/8" X 1")	TN050ABLXG16XXX
						2-7/16" (62mm)	K-Threaded Stem (3/8" - 16 - 1")	TN050ABLXK16XXX
						2-7/16" (62mm)	M-Threaded Stem (5/16" - 18 - 3/4")	TN050ABLXM12XXX
						2-5/8" (67mm)	B-Plate (1-1/2" X 2-1/8")	TN050ABLXTPBXXX
						2-5/8" (67mm)	C-Plate (1-3/16" X 2")	TN050ABLXTPCXXX
						2-5/8" (67mm)	LE Plate (1-3/4" X 3")	TN050ABLXTLEXXX
2-5/8" (67mm)	N Plate (1-1/2" X 1-1/2")	TN050ABLXTPNXXX						
See Icons below for options								
2-1/2" (63.5mm)	2 (50mm)	90 lbs. (40 kg)	Black	Black	Nylon	2-3/4" (70mm)	A-Grip Neck Stem (5/16" X 1-9/16")	TN060ABLXA70XXX
						2-3/4" (70mm)	D-Friction Ring Stem (7/16" X 1-3/8")	TN060ABLXD22XXX
						2-3/4" (70mm)	G-Friction Ring Stem (3/8" X 1")	TN060ABLXG16XXX
						2-3/4" (70mm)	K-Threaded Stem (3/8" - 16 - 1")	TN060ABLXK16XXX
						2-3/4" (70mm)	M-Threaded Stem (5/16" - 18 - 3/4")	TN060ABLXM12XXX
						2-15/16" (75mm)	B-Plate (1-1/2" X 2-1/8")	TN060ABLXTPBXXX
						2-15/16" (75mm)	C-Plate (1-3/16" X 2")	TN060ABLXTPCXXX
						2-15/16" (75mm)	LE Plate (1-3/4" X 3")	TN060ABLXTLEXXX
2-15/16" (75mm)	N Plate (1-1/2" X 1-1/2")	TN060ABLXTPNXXX						
See Icons below for options								

Additional colors available - Contact factory for details

Additional colors available - Contact factory for details

Polyurethane tread is also available - Contact factory for part numbers

Additional mounting options and lengths are available - Contact factory for specifications Brake versions are available - Contact factory for part numbers

## TB series

- Meets or Exceeds Industry Seating Standards
- Furniture



### "TB" series Nylon Hooded Twin Wheel Swivel Casters with Barrel, Specially designed to fit Office Armchairs

Wheel diameter Inch / (mm)	Caster Width	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Barrel Diameter	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers
2" (50mm)	2-3/16" (55mm)	110 lbs. (50 Kg.)	Black	1-1/2" (38mm)	Nylon	2-1/4" (57mm)	D-Friction Ring Stem (7/16" X 1-3/8")	TB50EABLXD22XXX
See Icons below for options								
2" (50mm)	2-3/16" (55mm)	110 lbs. (50 Kg.)	Black	1-3/4" (45mm)	Nylon	2-1/4" (57mm)	D-Friction Ring Stem (7/16" X 1-3/8")	TB50IABLXD22XXX
See Icons below for options								
2-3/16" (55mm)	2-3/16" (55mm)	110 lbs. (50 Kg.)	Black	1-1/2" (38mm)	Nylon	2-9/16" (66mm)	D-Friction Ring Stem (7/16" X 1-3/8")	TB55EABLXD22XXX
See Icons below for options								
2-3/16" (55mm)	2-3/16" (55mm)	110 lbs. (50 Kg.)	Black	1-3/4" (44.5mm)	Nylon	2-9/16" (66mm)	D-Friction Ring Stem (7/16" X 1-3/8")	TB55IABLXD22XXX
See Icons below for options								

Additional colors available - Contact factory for details Additional barrel diameters are available - Contact factory for details  
 Polyurethane tread is also available - Contact factory for part numbers Additional mounting options and lengths are available - Contact factory for specifications  
 Brake versions are available - Contact factory for part numbers

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.
2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.
3. Please refer to pages 37 & 40 for specific lengths and mounting options.

**MD series**

- Meets or Exceeds Industry Seating Standards
- Medical Equipment
- Displays
- Office Equipment
- Store Fixtures



**"MH" Series Hooded Twin Wheel Casters with Decorative Die Cast Hood**

Wheel diameter Inch / (mm)	Caster Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Caster Finish (Body)	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Caster Finish	Mounting Options <sup>3</sup>	Part Numbers					
2" (50mm)	1-11/16" (43mm)	75 lbs. (34 Kg.)	Black	Nylon	2-3/8" (60mm)	Chrome	A-Grip Neck Stem (5/16" X 1-9/16")	MH050ABLCA10XX0					
					2-3/8" (60mm)	Chrome	D-Friction Ring Stem (7/16" X 1-3/8")	MH050ABLCD22XX0					
					2-3/8" (60mm)	Chrome	G-Friction Ring Stem (3/8" X 1")	MH050ABLOG16XX0					
					2-3/8" (60mm)	Chrome	K-Threaded Stem (3/8" - 16 - 1")	MH050ABLCK16XX0					
					2-3/8" (60mm)	Chrome	M-Threaded Stem (5/16" - 18 - 3/4")	MH050ABLCM12XX0					
					2-5/8" (67mm)	Chrome	C-Plate (1-3/16" X 2")	MH050ABLCTPCXX0					
					2-5/8" (67mm)	Chrome	LE Plate (1-3/4" X 3")	MH050ABLCTLEXX0					
					2-5/8" (67mm)	Chrome	N Plate (1-1/2" X 1-1/2")	MH050ABLCTPNXX0					
					2-3/8" (60mm)	Brass	A-Grip Neck Stem (5/16" X 1-9/16")	MH050ABLBA10XX0					
					2-3/8" (60mm)	Brass	D-Friction Ring Stem (7/16" X 1-3/8")	MH050ABLBD22XX0					
					2-3/8" (60mm)	Brass	G-Friction Ring Stem (3/8" X 1")	MH050ABLBG16XX0					
					2-3/8" (60mm)	Brass	K-Threaded Stem (3/8" - 16 - 1")	MH050ABLBK16XX0					
					2-3/8" (60mm)	Brass	M-Threaded Stem (5/16" - 18 - 3/4")	MH050ABLBM12XX0					
					2-5/8" (67mm)	Brass	C-Plate (1-3/16" X 2")	MH050ABLTPCXX0					
					2-5/8" (67mm)	Brass	LE Plate (1-3/4" X 3")	MH050ABLBTLEXX0					
					2-5/8" (67mm)	Brass	N Plate (1-1/2" X 1-1/2")	MH050ABLTPNXX0					
					See Icons below for options								
					2-1/2" (63mm)	2" (50mm)	90 lbs. (40 Kg.)	Black	Nylon	2-11/16" (68mm)	Chrome	A-Grip Neck Stem (5/16" X 1-9/16")	MH060ABLCA10XX0
2-11/16" (68mm)	Chrome	D-Friction Ring Stem (7/16" X 1-3/8")	MH060ABLCD22XX0										
2-11/16" (68mm)	Chrome	G-Friction Ring Stem (3/8" X 1")	MH060ABLOG16XX0										
2-11/16" (68mm)	Chrome	K-Threaded Stem (3/8" - 16 - 1")	MH060ABLCK16XX0										
2-11/16" (68mm)	Chrome	M-Threaded Stem (5/16" - 18 - 3/4")	MH060ABLCM12XX0										
2-15/16" (75mm)	Chrome	A-Plate (1-1/4" X 1-5/8")	MH060ABLCTPAXX0										
2-15/16" (75mm)	Chrome	C-Plate (1-3/16" X 2")	MH060ABLCTPCXX0										
2-15/16" (75mm)	Chrome	LE Plate (1-3/4" X 3")	MH060ABLCTLEXX0										
2-15/16" (75mm)	Chrome	N Plate (1-1/2" X 1-1/2")	MH060ABLCTPNXX0										
2-11/16" (68mm)	Brass	A-Grip Neck Stem (5/16" X 1-9/16")	MH060ABLBA10XX0										
2-11/16" (68mm)	Brass	D-Friction Ring Stem (7/16" X 1-3/8")	MH060ABLBD22XX0										
2-11/16" (68mm)	Brass	G-Friction Ring Stem (3/8" X 1")	MH060ABLBG16XX0										
2-11/16" (68mm)	Brass	K-Threaded Stem (3/8" - 16 - 1")	MH060ABLBK16XX0										
2-11/16" (68mm)	Brass	M-Threaded Stem (5/16" - 18 - 3/4")	MH060ABLBM12XX0										
2-15/16" (75mm)	Brass	C-Plate (1-3/16" X 2")	MH060ABLTPCXX0										
2-15/16" (75mm)	Brass	LE Plate (1-3/4" X 3")	MH060ABLBTLEXX0										
2-15/16" (75mm)	Brass	N Plate (1-1/2" X 1-1/2")	MH060ABLTPNXX0										
See Icons below for options													

Polyurethane Tread is also available - Contact factory for part numbers

Additional finishes available - Contact factory for details

Additional mounting options and lengths are available - Contact factory for specifications Brake versions are available - Contact factory for part numbers

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.

2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.

3. Please refer to pages 37 & 40 for specific lengths and mounting options.

## TS series

- Meets or Exceeds Industry Seating Standards (2" & 2-1/2" only)
- Medical Equipment
- Displays
- Office Equipment
- Store Fixtures



### "TS" Series Nylon Hooded Twin Wheel Casters with Decorative Metal Shield

Wheel diameter Inch / (mm)	Caster Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Caster Finish	Mounting Options <sup>3</sup>	Part Numbers
1-5/8" (41.3mm)	1-9/16" (40mm)	40 lbs. (18 Kg.)	Black	Nylon	1-15/16" (49mm)	Stainless Steel	A-Grip Neck Stem (5/16" X 1-9/16")	TS040ABLAA70XXX
					1-15/16" (49mm)	Stainless Steel	D-Friction Ring Stem (7/16" X 1-3/8")	TS040ABLAD22XXX
					1-15/16" (49mm)	Stainless Steel	G-Friction Ring Stem (3/8" X 1")	TS040ABLAG16XXX
					1-15/16" (49mm)	Stainless Steel	K-Threaded Stem (3/8" - 16 - 1")	TS040ABLAK16XXX
					1-15/16" (49mm)	Stainless Steel	M-Threaded Stem (5/16" - 18 - 3/4")	TS040ABLAM12XXX
					2-1/4" (57mm)	Stainless Steel	A-Plate (1-1/4" X 1-5/8")	TS040ABLATPAXXX
					2-1/4" (57mm)	Stainless Steel	C-Plate (1-3/16" X 2")	TS040ABLATPCXXX
					2-1/4" (57mm)	Stainless Steel	N Plate (1-1/2" X 1-1/2")	TS040ABLATPNXXX
					1-15/16" (49mm)	Brass	A-Grip Neck Stem (5/16" X 1-9/16")	TS040ABLBA70XXX
					1-15/16" (49mm)	Brass	D-Friction Ring Stem (7/16" X 1-3/8")	TS040ABLBD22XXX
					1-15/16" (49mm)	Brass	G-Friction Ring Stem (3/8" X 1")	TS040ABLBG16XXX
					1-15/16" (49mm)	Brass	K-Threaded Stem (3/8" - 16 - 1")	TS040ABLBK16XXX
					1-15/16" (49mm)	Brass	M-Threaded Stem (5/16" - 18 - 3/4")	TS040ABLBM12XXX
					2-1/4" (57mm)	Brass	A-Plate (1-1/4" X 1-5/8")	TS040ABLBTAPXXX
					2-1/4" (57mm)	Brass	C-Plate (1-3/16" X 2")	TS040ABLBTAPCXXX
					2-1/4" (57mm)	Brass	N Plate (1-1/2" X 1-1/2")	TS040ABLBTAPNXXX
See icons below for options								
2" (50mm)	1-13/16" (46mm)	75 lbs. (34 Kg.)	Black	Nylon	2-7/16" (62mm)	Stainless Steel	A-Grip Neck Stem (5/16" X 1-9/16")	TS050ABLAA70XXX
					2-7/16" (62mm)	Stainless Steel	D-Friction Ring Stem (7/16" X 1-3/8")	TS050ABLAD22XXX
					2-7/16" (62mm)	Stainless Steel	G-Friction Ring Stem (3/8" X 1")	TS050ABLAG16XXX
					2-7/16" (62mm)	Stainless Steel	K-Threaded Stem (3/8" - 16 - 1")	TS050ABLAK16XXX
					2-7/16" (62mm)	Stainless Steel	M-Threaded Stem (5/16" - 18 - 3/4")	TS050ABLAM12XXX
					2-5/8" (67mm)	Stainless Steel	C-Plate (1-3/16" X 2")	TS050ABLATPCXXX
					2-5/8" (67mm)	Stainless Steel	LE Plate (1-3/4" X 3")	TS050ABLATLEXXX
					2-5/8" (67mm)	Stainless Steel	N Plate (1-1/2" X 1-1/2")	TS050ABLATPNXXX
					2-7/16" (62mm)	Brass	A-Grip Neck Stem (5/16" X 1-9/16")	TS050ABLBA70XXX
					2-7/16" (62mm)	Brass	D-Friction Ring Stem (7/16" X 1-3/8")	TS050ABLBD22XXX
					2-7/16" (62mm)	Brass	G-Friction Ring Stem (3/8" X 1")	TS050ABLBG16XXX
					2-7/16" (62mm)	Brass	K-Threaded Stem (3/8" - 16 - 1")	TS050ABLBK16XXX
					2-7/16" (62mm)	Brass	M-Threaded Stem (5/16" - 18 - 3/4")	TS050ABLBM12XXX
					2-5/8" (67mm)	Brass	C-Plate (1-3/16" X 2")	TS050ABLBTAPCXXX
					2-5/8" (67mm)	Brass	LE Plate (1-3/4" X 3")	TS050ABLBTLEXXX
					2-5/8" (67mm)	Brass	N Plate (1-1/2" X 1-1/2")	TS050ABLBTAPNXXX
See icons below for options								

Polyurethane tread is also available - Contact factory for part numbers

Additional finishes available - Contact factory for details

Additional mounting options and lengths are available - Contact factory for specifications Brake versions are available - Contact factory for part numbers

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.

2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.

3. Please refer to pages 37 & 40 for specific lengths and mounting options.

## TS series

- Meets or Exceeds Industry Seating Standards (2" & 2-1/2" only)
- Medical Equipment
- Displays
- Office Equipment
- Store Fixtures



### "TS" Series Nylon Hooded Twin Wheel Casters with Decorative Metal Shield

Wheel diameter Inch / (mm)	Caster Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Caster Finish	Mounting Options <sup>3</sup>	Part Numbers
2-1/2" (63.5mm)	2" (50mm)	90 lbs. (41 Kg.)	Black	Nylon	2-3/4" (70mm)	Stainless Steel	D-Friction Ring Stem (7/16" X 1-3/8")	TS060ABLAD22XXX
					2-3/4" (70mm)	Stainless Steel	G-Friction Ring Stem (3/8" X 1")	TS060ABLAG16XXX
					2-3/4" (70mm)	Stainless Steel	K-Threaded Stem (3/8" - 16 - 1")	TS060ABLAK16XXX
					2-3/4" (70mm)	Stainless Steel	M-Threaded Stem (5/16" - 18 - 3/4")	TS060ABLAM12XXX
					2-15/16" (75mm)	Stainless Steel	C-Plate (1-3/16" X 2")	TS060ABLATPCXXX
					2-15/16" (75mm)	Stainless Steel	LE Plate (1-3/4" X 3")	TS060ABLATLEXXX
					2-15/16" (75mm)	Stainless Steel	N Plate (1-1/2" X 1-1/2")	TS060ABLATPNXXX
					2-3/4" (70mm)	Brass	D-Friction Ring Stem (7/16" X 1-3/8")	TS060ABLBD22XXX
					2-3/4" (70mm)	Brass	G-Friction Ring Stem (3/8" X 1")	TS060ABLBG16XXX
					2-3/4" (70mm)	Brass	K-Threaded Stem (3/8" - 16 - 1")	TS060ABLBK16XXX
					2-3/4" (70mm)	Brass	M-Threaded Stem (5/16" - 18 - 3/4")	TS060ABLBM12XXX
					2-15/16" (75mm)	Brass	C-Plate (1-3/16" X 2")	TS060ABLBTPCXXX
					2-15/16" (75mm)	Brass	LE Plate (1-3/4" X 3")	TS060ABLBTLEXXX
					2-15/16" (75mm)	Brass	N Plate (1-1/2" X 1-1/2")	TS060ABLBTPNXXX

See icons below for options

Polyurethane tread is also available - Contact factory for part numbers

Additional finishes available - Contact factory for details

Additional mounting options and lengths are available - Contact factory for specifications Brake versions are available - Contact factory for part numbers

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.

2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.

3. Please refer to pages 37 & 40 for specific lengths and mounting options.

## OT series

- Meets or Exceeds Industry Seating Standards
- Displays
- Office Equipment
- Store Fixtures



### "OT and "OR" Series Open Twin Wheel Swivel/Rigid Nylon Casters

Wheel diameter Inch / (mm)	Caster Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers
2" (50mm)	2-3/16" (55.5mm)	75 lbs. (34 Kg.)	Black	Black	Nylon	2-3/16" (55mm)	A-Grip Neck Stem (5/16" X 1-9/16")	OT050ABLXA10XXX
						2-3/16" (55mm)	D-Friction Ring Stem (7/16" X 1-3/8")	OT050ABLXD22XXX
						2-3/16" (55mm)	G-Friction Ring Stem (3/8" X 1")	OT050ABLXG16XXX
						2-3/16" (55mm)	K-Threaded Stem (3/8" - 16 - 1")	OT050ABLXK16XXX
						2-3/16" (55mm)	M-Threaded Stem (5/16" - 18 - 3/4")	OT050ABLXM12XXX
						2-3/8" (60mm)	A-Plate (1-1/4" X 1-5/8")	OT050ABLXPAXXX
						2-3/8" (60mm)	C-Plate (1-3/16" X 2")	OT050ABLXTPCXXX
						2-3/8" (60mm)	LE Plate (1-3/4" X 3")	OT050ABLXTLXXX
See Icons below for options								
2-1/2" (63.5mm)	1-3/4" (44.5mm)	90 lbs. (40 Kg.)	Black	Black	Nylon	2-11/16" (68mm)	A-Grip Neck Stem (5/16" X 1-9/16")	OT060ABLXA10XXX
						2-11/16" (68mm)	D-Friction Ring Stem (7/16" X 1-3/8")	OT060ABLXD22XXX
						2-11/16" (68mm)	G-Friction Ring Stem (3/8" X 1")	OT060ABLXG16XXX
						2-11/16" (68mm)	K-Threaded Stem (3/8" - 16 - 1")	OT060ABLXK16XXX
						2-11/16" (68mm)	M-Threaded Stem (5/16" - 18 - 3/4")	OT060ABLXM12XXX
						2-7/8" (73mm)	C-Plate (1-3/16" X 2")	OT060ABLXTPCXXX
2-7/8" (73mm)	LE Plate (1-3/4" X 3")	OT060ABLXTLXXX						
See Icons below for options								
2-1/2" (63.5mm) Rigid Caster	1-3/4" (44.5mm)	90 lbs. (40 Kg.)	Black	Black	Nylon	2-7/8" (73mm)	C-Plate (1-3/16" X 2")	OR060ABLXTLXXX
See Icons below for options								

Additional colors available - Contact factory for details

Additional finishes available - Contact factory for details

Additional mounting options and lengths are available - Contact factory for specifications Brake versions are available - Contact factory for part numbers