


3S & 3R series

- Service Baskets and Carts
- Small Tool Boxes
- Displays
- Garment Racks

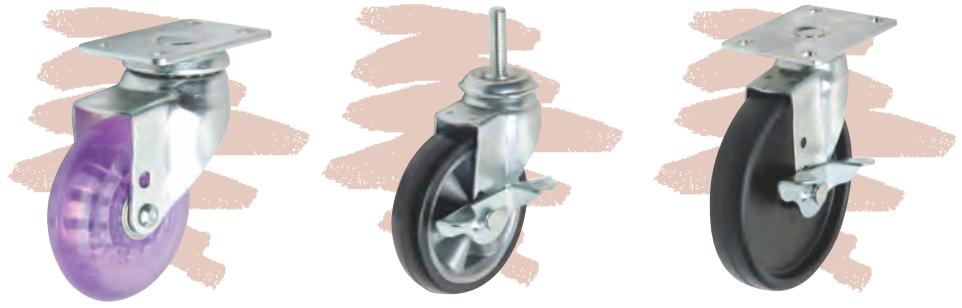


"3S" and "3R" Series Swivel/Rigid Casters for Light and Medium Duty Institutional Applications

Wheel diameter Inch / (mm)	Tread Width Inch (mm)	Load Rating ² Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height ¹ (Reference only)	Mounting Options ³	Part Numbers-Swivel
3" (75mm)	13/16" (20.5mm)	135 lbs. (61 Kg.)	Black	Zinc	Black Poly	Stem 3-15/16" (100mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1")	3S076ABLZD22XXX 3S076ABLZE30XXX 3S076ABLZF16XXX 3S076ABLZH16XXX
						Plate 4-1/16" (102mm)	30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S076ABLZT30XXX 3S076ABLZTLEXXX
See Icons below for options								
3" (75mm)	13/16" (20.5mm)	125 lbs. (57 Kg.)	Black	Zinc	Bushed Hard Core Soft Tread Rubber	Stem 3-15/16" (100mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1")	3S0762BLZD22XXX 3S0762BLZE30XXX 3S0762BLZF16XXX 3S0762BLZH16XXX
						Plate 4-1/16" (102mm)	30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S0762BLZT30XXX 3S0762BLZTLEXXX
See Icons below for options								
3" (75mm)	13/16" (20.5mm)	135 lbs. (61 Kg.)	Black	Zinc	Bushed - All Hard Rubber	Stem 3-15/16" (100mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1")	3S0766BLZD22XXX 3S0766BLZE30XXX 3S0766BLZF16XXX 3S0766BLZH16XXX
						Plate 4-1/16" (102mm)	30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S0766BLZT30XXX 3S0766BLZTLEXXX
See Icons below for options								
4" (100mm)	15/16" (23.8mm)	135 lbs. (61 Kg.)	Black	Zinc	Black Poly	Stem 5-3/16" (130mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1")	3S101ABLZD22XXX 3S101ABLZE30XXX 3S101ABLZF16XXX 3S101ABLZH16XXX
						Plate 5-1/4" (133mm)	30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S101ABLZT30XXX 3S101ABLZTLEXXX
See Icons below for options								
4" (100mm)	15/16" (23.8mm)	125 lbs. (57 Kg.)	Black	Zinc	Bushed Hard Core Soft Tread Rubber	Stem 5-3/16" (130mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1")	3S1012BLZD22XXX 3S1012BLZE30XXX 3S1012BLZF16XXX 3S1012BLZH16XXX
						Plate 5-1/4" (133mm)	30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S1012BLZT30XXX 3S1012BLZTLEXXX
See Icons below for options								
4" (100mm)	15/16" (23.8mm)	135 lbs. (61 Kg.)	Black	Zinc	Bushed - All Hard Rubber	Stem 5-3/16" (130mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1")	3S1016BLZD22XXX 3S1016BLZE30XXX 3S1016BLZF16XXX 3S1016BLZH16XXX
						Plate 5-1/4" (133mm)	30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S1016BLZT30XXX 3S1016BLZTLEXXX
See Icons below for options								

3S & 3R series

- Service Baskets and Carts
- Small Tool Boxes
- Displays
- Garment Racks

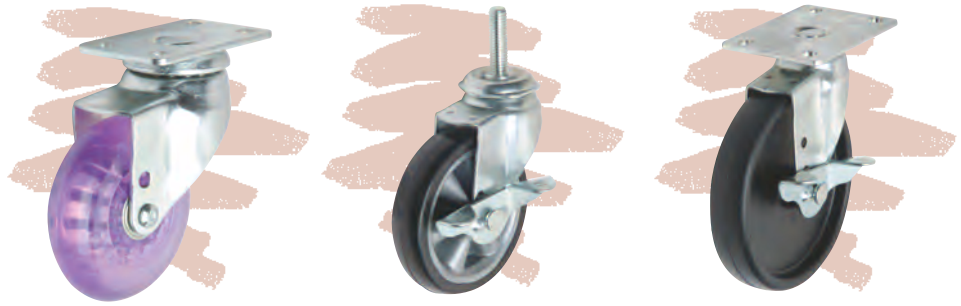

"3S" and "3R" Series Swivel/Rigid Casters for Light and Medium Duty Institutional Applications

Wheel diameter Inch / (mm)	Tread Width Inch (mm)	Load Rating ² Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height ¹ (Reference only)	Mounting Options ³	Part Numbers-Swivel
5" (125mm)	15/16" (23.8mm)	135 lbs. (61 Kg.)	Black	Zinc	Black Poly	Stem 5-15/16" (150mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1") 30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S127ABLZD22XXX 3S127ABLZE30XXX 3S127ABLZF16XXX 3S127ABLZH16XXX 3S127ABLZT30XXX 3S127ABLZTLEXXX
						Plate 6-1/16" (153mm)		
See Icons below for options								
5" (125mm)	15/16" (23.8mm)	125 lbs. (57 Kg.)	Black	Zinc	Bushed Hard Core Soft Tread Rubber	Stem 5-15/16" (150mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1") 30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S1272BLZD22XXX 3S1272BLZE30XXX 3S1272BLZF16XXX 3S1272BLZH16XXX 3S1272BLZT30XXX 3S1272BLZTLEXXX
						Plate 6-1/16" (153mm)		
See Icons below for options								
5" (125mm)	15/16" (23.8mm)	135 lbs. (61 Kg.)	Black	Zinc	Bushed - All Hard Rubber	Stem 5-15/16" (150mm)	D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") F-Threaded Stem (7/16" - 14)3 H-Threaded Stem (1/2" - 13 - 1") 30 Plate (2-3/4" X 3-5/8") LE Plate (1-3/4" X 3")	3S1276BLZD22XXX 3S1276BLZE30XXX 3S1276BLZF16XXX 3S1276BLZH16XXX 3S126BLZT30XXX 3S1276BLZTLEXXX
						Plate 6-1/16" (153mm)		
See Icons below for options								
Rigid Only								
3" (75mm)	13/16" (20.5mm)	135 lbs.	Black	Zinc	Black Poly	Plate 4-1/16" (102mm)	30 Plate (2-3/4" X 3-5/8") 30 Plate (2-3/4" X 3-5/8") 30 Plate (2-3/4" X 3-5/8")	3R076ABLZT30XXX 3R076ABLZT30XXX 3R076ABLZT30XXX
		125 lbs.						
		135 lbs.						
See Icons below for options								
4" (100mm)	15/16" (23.8mm)	135 lbs.	Black	Zinc	Black Poly	Plate 5-1/4" (133mm)	30 Plate (2-3/4" X 3-5/8") 30 Plate (2-3/4" X 3-5/8") 30 Plate (2-3/4" X 3-5/8")	3R101ABLZT30XXX 3R101ABLZT30XXX 3R101ABLZT30XXX
		125 lbs.						
		135 lbs.						
See Icons below for options								
5" (125mm)	15/16" (23.8mm)	135 lbs.	Black	Zinc	Black Poly	Plate 6-1/16" (153mm)	30 Plate (2-3/4" X 3-5/8") 30 Plate (2-3/4" X 3-5/8") 30 Plate (2-3/4" X 3-5/8")	3R127ABLZT30XXX 3R127ABLZT30XXX 3R127ABLZT30XXX
		125 lbs.						
		135 lbs.						
See Icons below for options								

Additional colors available - Contact factory for details
 Additional finishes also available - Contact factory for details
 Additional wheel types also available - Contact factory
 Additional mounting options are available - Contact factory for specifications
 Options: Side Brake Nut and Bolt Axles Hex Top Cap Rigid with Top Plate

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.
 2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.
 3. Please refer to pages 37 & 40 for specific lengths and mounting options.