

IC series

- Office Furniture
- Medical Equipment
- Store Fixtures
- Mop Buckets and Maintenance Equipment



"IC" Series Swivel Casters offer the highest performance when Frequent Movement is Required

Wheel diameter Inch / (mm)	Tread Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers-Swivel
2" (50mm)	3/4" (19.0mm)	75 lbs. (34 kg.)	Black	Zinc	Black Poly	Stem 2-1/2" (63mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC050ABLZA60XXX IC050ABLZB60XXX IC050ABLDZ22XXX IC050ABLZE30XXX IC050ABLZG16XXX IC050ABLZK16XXX IC050ABLZM16XXX
						Plate 2-5/8" (65mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC050ABLZTPCXXX IC050ABLZTLEXXX
See Icons below for options								
2" (50mm)	3/4" (19.0mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed Hard core Soft Tread Rubber	Stem 2-1/2" (63mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC0502BLZA60XXX IC0502BLZB60XXX IC0502BLZD22XXX IC0502BLZE30XXX IC0502BLZG16XXX IC0502BLZK16XXX IC0502BLZM16XXX
						Plate 2-5/8" (65mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC0502BLZTPCXXX IC0502BLZTLEXXX
See Icons below for options								
2" (50mm)	3/4" (19.0mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed- All Hard Rubber	Stem 2-1/2" (63mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC0506BLZA60XXX IC0506BLZB60XXX IC0506BLZD22XXX IC0506BLZE30XXX IC0506BLZG16XXX IC0506BLZK16XXX IC0506BLZM16XXX
						Plate 2-5/8" (65mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC0506BLZTPCXXX IC0506BLZTLEXXX
See Icons below for options								
2" (50mm)	3/4" (19.0mm)	75 lbs. (34 kg.)	Black/ Grey	Zinc	Thermo- plastic Rubber	Stem 2-1/2" (63mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC050LBYZA60XXX IC050LBYZB60XXX IC050LBYZD22XXX IC050LBYZEXXXXX IC050LBYZG16XXX IC050LBYZK16XXX IC050LBYZM16XXX
						Plate 2-5/8" (65mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC050LBYZTPCXXX IC050LBYZTLEXXX
See Icons below for options								

Available finishes: Nickel Chrome Brass Black Oxide  
 Additional wheel materials available - Contact factory for details types  
 Additional mounting options are available - Contact factory for specifications  
 Options: Side Brake Nut and Bolt Axles Hex Top Cap

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.  
 2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.  
 3. Please refer to pages 37 & 40 for specific lengths and mounting options.

## IC series

- Office Furniture
- Medical Equipment
- Store Fixtures
- Mop Buckets and Maintenance Equipment



### "IC" Series Swivel Casters offer the highest performance when Frequent Movement is Required


Wheel diameter Inch / (mm)	Tread Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers-Swivel
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Black Poly	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC063ABLZA60XXX IC063ABLZB60XXX IC063ABLZD22XXX IC063ABLZE30XXX IC063ABLZG16XXX IC063ABLZK16XXX IC063ABLZM16XXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC063ABLZTPCXXX IC063ABLZTLEXXX
See Icons below for options								
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed Hard core Soft Tread Rubber	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC0632BLZA60XXX IC0632BLZB60XXX IC0632BLZD22XXX IC0632BLZE30XXX IC0632BLZG16XXX IC0632BLZK16XXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC0632BLZM16XXX IC0632BLZTPCXXX IC0632BLZTLEXXX
See Icons below for options								

Available finishes: Nickel Chrome Brass Black Oxide  
 Additional wheel materials available - Contact factory for details types  
 Additional mounting options are available - Contact factory for specifications  
 Options: Side Brake Nut and Bolt Axles Hex Top Cap

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.  
 2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.  
 3. Please refer to pages 37 & 40 for specific lengths and mounting options.

**IC series**

- Office Furniture
- Medical Equipment
- Store Fixtures
- Mop Buckets and Maintenance Equipment

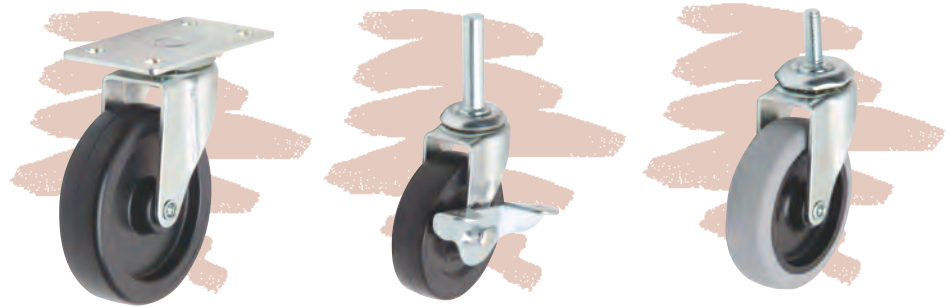

**"IC" Series Swivel Casters offer the highest performance when Frequent Movement is Required**

Wheel diameter Inch / (mm)	Tread Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers-Swivel
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed- All Hard Rubber	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC0636BLZA60XXX IC0636BLZB60XXX IC0636BLZD16XXX IC0636BLZE30XXX IC0636BLZG16XXX IC0636BLZK16XXX IC0636BLZM16XXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC0636BLZTPCXXX IC0636BLZTLEXXX
See Icons below for options								
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black/ Grey	Zinc	Thermoplastic Rubber	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC063LBYZA60XXX IC063LBYZB60XXX IC063LBYZD22XXX IC063LBYZE30XXX IC063LBYZG16XXX IC063LBYZK16XXX IC063LBYZM16XXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC063LBYZTPCXXX IC063LBYZTLEXXX
See Icons below for options								
3" (75mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Black Poly	Stem 3-9/16" (90mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC076ABLZA60XXX IC076ABLZB60XXX IC076ABLDZ22XXX IC076ABLZE30XXX IC076ABLZG16XXX IC076ABLZK16XXX IC076ABLZM16XXX
						Plate 3-21/32" (93mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC076ABLZTPCXXX IC076ABLZTLEXXX
See Icons below for options								
3" (75mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed Hard core Soft Tread Rubber	Stem 3-9/16" (90mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC0762BLZA60XXX IC0762BLZB60XXX IC0762BLZD22XXX IC0762BLZE30XXX IC0762BLZG16XXX IC0762BLZK16XXX IC0762BLZM16XXX
						Plate 3-21/32" (93mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC0762BLZTPCXXX IC0762BLZTLEXXX
See Icons below for options								

Available finishes: Nickel Chrome Brass Black Oxide  
 Additional wheel materials available - Contact factory for details types  
 Additional mounting options are available - Contact factory for specifications  
 Options: Side Brake Nut and Bolt Axles Hex Top Cap

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.  
 2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.  
 3. Please refer to pages 37 & 40 for specific lengths and mounting options.

## IC series

- Office Furniture
- Medical Equipment
- Store Fixtures
- Mop Buckets and Maintenance Equipment



### "IC" Series Swivel Casters offer the highest performance when Frequent Movement is Required

Wheel diameter Inch / (mm)	Tread Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers-Swivel
3" (75mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed- All Hard Rubber	Stem 3-9/16" (90mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC0766BLZA60XXX IC0766BLZB60XXX IC0766BLZD22XXX IC0766BLZE30XXX IC0766BLZG16XXX IC0766BLZK16XXX IC0766BLZM16XXX
						Plate 3-21/32" (93mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC0766BLZTPCXXX IC0766BLZTLEXXX
See Icons below for options								
3" (75mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black/ Grey	Zinc	Thermo- plastic Rubber	Stem 3-9/16" (90mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IC076LBYZA60XXX IC076LBYZB60XXX IC076LBYZD22XXX IC076LBYZE30XXX IC076LBYZG16XXX IC076LBYZK16XXX IC076LBYZM16XXX
						Plate 3-21/32" (93mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IC076LBYZTPCXXX IC076LBYZTLEXXX
See Icons below for options								

Available finishes: Nickel Chrome Brass Black Oxide

Additional wheel materials available - Contact factory for details types

Additional mounting options are available - Contact factory for specifications

Options: Side Brake Nut and Bolt Axles Hex Top Cap


1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.

2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.

3. Please refer to pages 37 & 40 for specific lengths and mounting options.

## IH series

- Office Furniture
- Medical Equipment
- Store Fixtures
- Mop Buckets and Maintenance Equipment

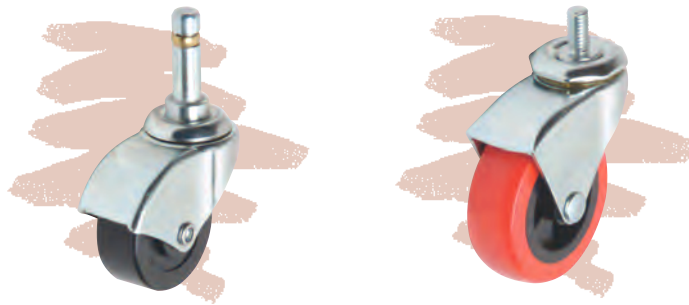

"IH" Series Hooded Swivel Casters offer the highest performance when Frequent Movement is Required

Wheel diameter Inch / (mm)	Tread Width Inch (mm)	Load Rating <sup>2</sup> Lbs. / Kg.	Wheel Color	Caster Finish	Wheel Material	Overall Height <sup>1</sup> (Reference only)	Mounting Options <sup>3</sup>	Part Numbers-Swivel
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Black Poly	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IH063ABLZA60XXX IH063ABLZB60XXX IH063ABLDZ22XXX IH063ABLZE30XXX IH063ABLZG16XXX IH063ABLZK16XXX IH063ABLZM16XXX IH063ABLZTPCXXX IH063ABLZTLEXXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IH063ABLZTPCXXX IH063ABLZTLEXXX
See Icons below for options								
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed Hard Core Soft Tread Rubber	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IH0632BLZA60XXX IH0632BLZB60XXX IH0632BLZD22XXX IH0632BLZE30XXX IH0632BLZG16XXX IH0632BLZK16XXX IH0632BLZM16XXX IH0632BLZTPCXXX IH0632BLZTLEXXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IH0632BLZTPCXXX IH0632BLZTLEXXX
See Icons below for options								
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black	Zinc	Bushed- All Hard Rubber	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IH0636BLZA60XXX IH0636BLZB60XXX IH0636BLZD22XXX IH0636BLZE30XXX IH0636BLZG16XXX IH0636BLZK16XXX IH0636BLZM16XXX IH0636BLZTPCXXX IH0636BLZTLEXXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IH0636BLZTPCXXX IH0636BLZTLEXXX
See Icons below for options								
2-1/2" (63.5mm)	13/16" (20.6mm)	75 lbs. (34 kg.)	Black/ Grey	Zinc	Thermo- plastic Rubber	Stem 3" (78mm)	A-Grip Neck Stem (5/16" X 1-9/16") B-Grip Neck Stem (3/8" X 1-5/8") D-Friction Ring Stem (7/16" X 1-3/8") E-Stem Straight (7/16" X 1-7/8") G-Friction Ring Stem (3/8" X 1") K-Threaded Stem (3/8" - 16 - 1") M-Threaded Stem (5/16" - 18 - 3/4")	IH063LBYZA60XXX IH063LBYZB60XXX IH063LBYZD22XXX IH063LBYZE30XXX IH063LBYZG16XXX IH063LBYZK16XXX IH063LBYZM16XXX IH063LBYZTPCXXX IH063LBYZTLEXXX
						Plate 3-3/16" (81mm)	C-Plate (1-3/16" X 2") LE Plate (1-3/4" X 3")	IH063LBYZTPCXXX IH063LBYZTLEXXX
See Icons below for options								

Available finishes also available - Contact factory for details  
 Additional wheel materials available - Contact factory for details types  
 Additional mounting options are available - Contact factory for specifications  
 Options: Side Brake Nut and Bolt Axles Hex Top cap Rigid with Top Plate

1. Overall heights are estimated. For exact dimensions and tolerances, please contact factory and request samples to determine fitness for use in your application.  
 2. Load ratings are estimated. Always load test your caster to your required application to determine fitness for use.  
 3. Please refer to pages 37 & 40 for specific lengths and mounting options.