

To order casters or for more information, please call toll free **1-800-215-8220**



design award
winner
2000



SERIES 557
(WITH CABLE GUARD)

TWIN WHEEL SWIVEL CASTOR SERIES 550

TWIN WHEEL SWIVEL CASTOR SERIES 551

WITH TOTAL LOCK,
Ø 65 mm WITH WHEEL BRAKE

TWIN WHEEL SWIVEL CASTOR SERIES 552

WITH DIRECTIONAL LOCK,
ONLY WITH WHEEL-Ø 125 mm

TWIN WHEEL SWIVEL CASTOR SERIES 557

WITH DUAL LOCK FUNCTION,



DIRECTIONAL LOCK

NEUTRAL

TOTAL LOCK

ONLY WITH WHEEL-Ø 125 mm and 150 mm

RIGID CASTOR SERIES 554

ONLY WITH WHEEL-Ø 65 mm

Features:

- grey white (RAL 9002) – polyamide housing
see page 54+55
- grey (RAL 7004) – polyamide housing
see page 56–59
- Combined plain-ball bearing swivel
in Ø 65 mm, 75 mm and 100 mm
- Precision ball bearing swivel in Ø 125 mm and 150 mm

Options:

- Further RAL colours available, minimum order quantity
required, please contact STEINCO
- Further fittings available
- Precision ball bearing swivel in Ø 100 mm
- Grey polyamide plain bearing wheels
in Ø 65 mm and 75 mm
- cable guard in Ø 125 mm and 150 mm


To order casters or for more information, please call toll free **1-800-215-8220**



BALL BEARING WHEEL

- Non marking grey polyurethane tyred
- Polyamide hub, wheel cover in RAL 9002
- Precision ball bearing
- Screwed axle
- Wheel-Ø 125mm, 150mm


FITTINGS



SERIES 550	SERIES 550H	SERIES 551	SERIES 551H	SERIES 557
SWIVEL CASTOR	SWIVEL CASTOR	SWIVEL CASTOR WITH TOTAL LOCK	SWIVEL CASTOR WITH TOTAL LOCK	SWIVEL CASTOR WITH DUAL LOCK FUNCTION

STEM	mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.	Code-no.	Code-no.
	18,65 x 25	125	20	110	168	40		3.TPG.DPB		4.TQG.DPB	4.TRG.DPB
	18,65 x 25	150	20	110	190	52	3.SF5.DQH		4.SR5.DQH		4.SK5.DQH

TOP PLATE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.	Code-no.	Code-no.
77 x 67	125	20	110	170	40		3.TPW.DPB		4.TQW.DPB	4.TRW.DPB
77 x 67	150	20	110	192	52	3.SFA.DQH		4.SRA.DQH		4.SKA.DQH

Top plate dimensions shown on page 113.

THREADED STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.	Code-no.	Code-no.
M 12 x 25	125	20	110	164	40		3.TPL.DPB		4.TQL.DPB	4.TRL.DPB
M 12 x 25	150	20	110	186	52	3.SEA.DQH		4.SQA.DQH		4.SJA.DQH

SERIES 557

THE TWIN WHEEL CASTOR COMBINES TOTAL- AND DIRECTIONAL LOCK BRAKE. THIS NEW CONCEPT ENABLES THE USER TO OPERATE THREE DIFFERENT FUNCTIONS BY ONE BRAKE PEDAL:



DIRECTIONAL LOCK



NEUTRAL



TOTAL LOCK




To order casters or for more information, please call toll free **1-800-215-8220**



BALL BEARING WHEEL

- **Electrically conductive,**
non marking grey polyurethane tyred
- Polyamide hub, wheel cover in RAL 9002
- Precision ball bearing
- Screwed axle
- Wheel-Ø 125 mm, 150 mm

FITTINGS



SERIES 550	SERIES 550H	SERIES 551	SERIES 551H	SERIES 557
SWIVEL CASTOR	SWIVEL CASTOR	SWIVEL CASTOR WITH TOTAL LOCK	SWIVEL CASTOR WITH TOTAL LOCK	SWIVEL CASTOR WITH DUAL FUNCTION

STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.	Code-no.	Code-no.
18,65 x 25	125	20	110	168	40		3.TPH.DPD		4.TQH.DPD	4.TRH.DPD
18,65 x 25	150	20	110	190	52	3.SF6.DQJ		4.SR6.DQJ		4.SK6.DQJ

TOP PLATE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.	Code-no.	Code-no.
77 x 67	125	20	110	170	40		3.TPX.DPD		4.TQX.DPD	4.TRX.DPD
77 x 67	150	20	110	192	52	3.SFB.DQJ		4.SRB.DQJ		4.SKB.DQJ

Top plate dimensions shown on page 113

THREADED STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.	Code-no.	Code-no.
M 12 x 25	125	20	110	164	40		3.TPM.DPD		4.TQM.DPD	4.TRM.DPD
M 12 x 25	150	20	110	186	52	3.SEB.DQJ		4.SQB.DQJ		4.SJB.DQJ

The three functions are activated by pushing the brake pedal up or downwards:

Directional lock – the device has to be pushed at longer distance. Lift the brake pedal up (see symbol ...)! 

Total lock – to secure and block the device for safety reasons. Push the brake pedal down (see symbol ...)! 

Neutral – the device is pushed over short distances, e.g. within a room (see symbol ...)! 

We work with quality materials to produce our castors and wheels. They guarantee high durability and excellent manoeuvrability. Housing and wheel hubs are made of polyamide, wheel tyre material is polyurethane.

- Top plate and plain stem are the appropriate fittings for Series 557
- It is available in 125 and 150mm
- Standard colour is grey white, RAL 9002
- Electrically-conductive version in RAL 9002 available. The grey conductive polyurethane tyres are non marking. Resistance is 10.000 Ohm


To order casters or for more information, please call toll free **1-800-215-8220**



BALL BEARING WHEEL

- Non marking grey polyurethane tread
- Polyamide hub, wheel cover in RAL 7004
- Precision ball bearing
- Screwed axle
- Wheel-Ø 100mm, 125mm

FITTINGS

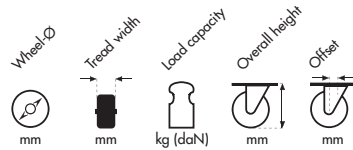

SERIES 550 SWIVEL CASTOR

SERIES 551 SWIVEL CASTOR WITH TOTAL LOCK

SERIES 552 SWIVEL CASTOR WITH DIRECTIONAL LOCK

THREADED STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.
M 10 x 15	100	20	70	119	31	3.R0B.DMA	4.R4B.DMA	
M 12 x 15	100	20	100	121	31	3.R00.DMA	4.R40.DMA	
M 12 x 25	125	20	110	149	40	3.TAA.DPA	4.TEA.DPA	

TOP PLATE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset	Code-no.	Code-no.	Code-no.
55 x 55	100	20	100	124	31	3.R1D.DMA	4.R5D.DMA	
77 x 67	125	20	110	154	40	3.TCA.DPA	4.TGA.DPA	4.TNA.DPA

Top plate dimensions shown on page 113.


To order casters or for more information, please call toll free **1-800-215-8220**



BALL BEARING WHEEL

- **Electrically conductive**, non marking grey polyurethane tread
- Polyamide hub, wheel cover in RAL 7004
- Precision ball bearing
- Screwed axle
- Wheel-Ø 125 mm

FITTINGS

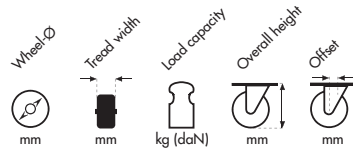

SERIES 550
SWIVEL CASTOR

SERIES 551
SWIVEL CASTOR
WITH TOTAL LOCK

SERIES 552
SWIVEL CASTOR
WITH
DIRECTIONAL LOCK

THREADED STEM



mm
M 12 x 25



125 20 110 149 40

Code-no.

3.TAC.DPC

Code-no.

4.TEC.DPC

Code-no.

TOP PLATE



mm
77 x 67



125 20 110 154 40

Code-no.

3.TCC.DPC

Code-no.

4.TGC.DPC

Code-no.

4.TNC.DPC


Top plate dimensions shown on page 113.



PLAIN BEARING WHEEL

- Non marking, grey polyurethane tyred
- Polyamid hub with wheel cover in RAL 7004
- Riveted axle
- Wheel-Ø 65 mm, 75 mm, 100 mm

FITTINGS

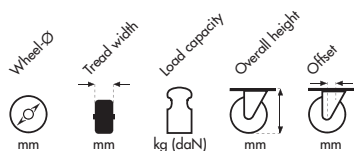


SERIES 550	SERIES 551	SERIES 551	SERIES 554
SWIVEL CASTOR	SWIVEL CASTOR WITH WHEEL BRAKE	SWIVEL CASTOR WITH TOTAL LOCK	RIGID CASTOR
Code-no.	Code-no.	Code-no.	

THREADED STEM



mm	Wheel-Ø	Tread width	Load capacity kg (daN)	Overall height	Offset	Code-no.	Code-no.	Code-no.
M 10 x 15	65	14	70	79	20	3.RQL.DGA	4.RUL.DGA	
M 10 x 15	75	18	70	90	23	3.S1A.DLA		4.S5A.DLA
M 10 x 15	100	20	70	119	31	3.R0A.DHA		4.R4A.DHA
M 12 x 15	65	14	70	81	20	3.RQS.DGA	4.RUS.DGA	
M 12 x 15	75	18	70	92	23	3.S1T.DLA		4.S5T.DLA
M 12 x 15	100	20	100	121	31	3.R0T.DHA		4.R4T.DHA

TOP PLATE



mm	Wheel-Ø	Tread width	Load capacity kg (daN)	Overall height	Offset	Code-no.	Code-no.	Code-no.	Code-no.
55 x 55	65	14	70	79	20	3.RSA.DGA	4.RWA.DGA		
55 x 55	75	18	70	95	23	3.S3A.DLA		4.S7A.DLA	
55 x 55	100	20	100	124	31	3.R1A.DHA		4.R5A.DHA	
90 x 55	65	14	70	79					5.RZA.DGA

Top plate dimensions shown on page 113.

PLAIN STEM AND CIRCLIP



mm	Wheel-Ø	Tread width	Load capacity kg (daN)	Overall height	Offset	Code-no.	Code-no.
10 x 34	65	14	70	78	20	3.RRA.DGA	4.RVA.DGA

A list of sockets for round and square tubing appears on page 112.


To order casters or for more information, please call toll free **1-800-215-8220**



PLAIN BEARING WHEEL

- **Electrically conductive**, non marking, grey polyurethane tyred
- Polyamid hub with wheel cover in RAL 7004
- Riveted axle
- Wheel-Ø 65 mm, 75 mm, 100 mm

FITTINGS



SERIES 550

SWIVEL CASTOR

SERIES 551

SWIVEL CASTOR WITH WHEEL BRAKE

SERIES 551

SWIVEL CASTOR WITH TOTAL LOCK

THREADED STEM



	mm						Code-no.	Code-no.	Code-no.
M 10x15	65	14	70	79	20		3.RQN.DGC	4.RUN.DGC	
M 10x15	75	18	70	90	23		3.S1C.DLC		4.S5C.DLC
M 10x15	100	20	70	119	31		3.ROC.DHC		4.R4C.DHC
M 12x15	65	14	70	81	20		3.RQU.DGC	4.RUU.DGC	
M 12x15	75	18	70	92	23		3.S1V.DLC		4.S5V.DLC
M 12x15	100	20	100	121	31		3.R0V.DHC		4.R4V.DHC

TOP PLATE



	mm						Code-no.	Code-no.	Code-no.
55x55	65	14	70	79	20		3.RSC.DGC	4.RWC.DGC	
55x55	75	18	70	95	23		3.S3C.DLC		4.S7C.DLC
55x55	100	20	100	124	31		3.R1V.DHC		4.R5C.DHC

Top plate dimensions shown on page 113.

PLAIN STEM AND CIRCLIP



	mm						Code-no.	Code-no.
10x34	65	14	70	78	20		3.RRC.DGC	4.RVC.DGC

Please contact us for electrically conductive sockets.