

Double Wheel Casters

LIGHT & LIGHT MEDIUM DUTY

Light Duty 020-DW


The obvious purpose of a dual wheel caster is to offer more floor contact for equipment considered to be top heavy, such as electronic cabinets or heavy furniture. The combination of larger surface areas and the low overall height allow these duals to maneuver well in tight areas and under heavy loads.

The two separate distinct ball races make for the easiest swiveling possible. Heat treated, with a longer service life. Shouldered axles are replaceable. Zinc plated.

Optional Extras: WK Wheel Brake

Light Medium Duty 060-DW

The 060-DW double wheel casters provide a wider floor surface contact and an even larger double ball bearing swivel raceway design. All parts are hardened for longer wear. Replaceable shouldered axles. Zinc plated.

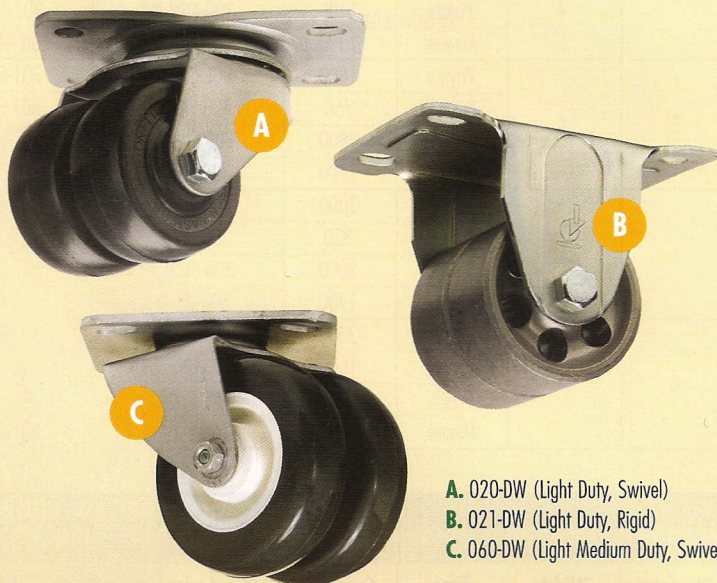

A. 020-DW (Light Duty, Swivel)
 B. 021-DW (Light Duty, Rigid)
 C. 060-DW (Light Medium Duty, Swivel)

DOUBLE WHEEL SWIVEL CASTERS / LIGHT DUTY

WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	TOP PLATE		
Diameter inches	Width inches	Type	Cap Each lbs	Swivel Plain, Oilite, Delrin Bearings	Rigid Plain, Oilite, Delrin Bearings				Width by Length inches	Bolt Hole Spacing	Size of Bolt Holes
2	1 3/4	Payron	200	020-2PS-DW	021-2PS-DW	3/4	2 1/4	2 7/8	2 1/2 x 3 3/4	1 3/4 x 2 7/8 -3	2 1/64
		Payflex	150	020-20X-DW	021-20X-DW						
		Payrock	200	020-20H-DW	021-20H-DW						
		Peejay	200	020-2PJ-DW	021-2PJ-DW						
3	1 5/8	Payflex	250	020-30X-DW	021-30X-DW	1 1/2	3 3/4	3 1 5/16	2 1/2 x 3 3/4	1 3/4 x 2 7/8 -3	2 1/64
		Payrock	250	020-30H-DW	021-30H-DW						
	Peejay	250	020-3PJ-DW	021-3PJ-DW							
	Mirakush	290	020-3DR-DW	021-3DR-DW							
	Miratek	290	020-3DF-DW	021-3DF-DW							

Stems are available, see page 13 for options. Please consult factory. Tread width shown is a combination of the two wheels.

DOUBLE WHEEL SWIVEL CASTERS / LIGHT MEDIUM

WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	TOP PLATE		
Diameter inches	Width inches	Type	Cap Each lbs	Swivel Plain, Oilite, Delrin Bearings	Ball Bearings				Width by Length inches	Bolt Hole Spacing	Size of Bolt Holes
3	2 3/4	Payron	300	060-3PS-DW		3	3 3/4	4 1/8	3 3/4 x 4 5/8	2 5/8 x 3 5/8 slotted to 3 x 3"	2 5/64
		Payflex	220	060-30X-DW							
		Payrock	300	060-30H-DW							
	Peejay	300	060-3PJ-DW								
4	2 1/2	Payflex	300	060-40X-DW		4 1/2	3 3/8	4 1 5/16	3 3/4 x 4 5/8	2 5/8 x 3 5/8 slotted to 3 x 3"	2 5/64
		Payrock	375	060-40H-DW							
		Peejay	375	060-4PJ-DW							
	2 1/4	Mirakush	325	060-4DR-DW	060-4BR-DW						
		Miratek	350	060-4DF-DW	060-4BF-DW						

Stems are available, see page 23 for options. Please consult factory. Tread width shown is a combination of the two wheels. No rigids.