



SERIES 850

SERIES 854



SERIES 851

SWIVEL CASTOR SERIES 850

SWIVEL CASTOR SERIES 851
WITH TOTAL LOCK

RIGID CASTOR SERIES 854

Features:

- Grey (RAL 7004) polyamide casing
- Double ball bearing swivel
- Plastic cover on swivel and axle
- Wheel-Ø 100 mm and 125 mm

Options:

- Further RAL colours available, minimum order quantity required, please contact STEINCO
- Further fittings available
- Stainless steel version on page 96

**HOSPITAL AND ELECTRO-
MEDICAL EQUIPMENT**

**COMMERCIAL KITCHEN
EQUIPMENT**

BAKERY EQUIPMENT




design award
winner
1992



BALL BEARING WHEEL

- Non marking grey thermoplastic rubber tyred
- Polypropylene hub
- Ball bearing
- Screwed axle
- Wheel-Ø 100 mm, 125 mm

FITTINGS

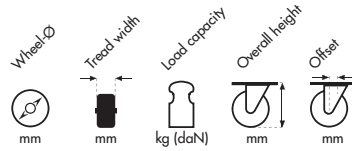

SERIES 850
SWIVEL CASTOR

SERIES 851
SWIVEL CASTOR WITH
TOTAL LOCK

SERIES 854
RIGID CASTOR

BOLT HOLE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
10,3	100	32	90	135	33
10,3	125	32	100	161	35
12,8	100	32	90	135	33
12,8	125	32	100	161	35

See page 114.

Code-no.

Code-no.

1.KJA.PTB	2.KNA.PTB
1.KAA.PUB	2.KEA.PUB
1.KJG.PTB	2.KNG.PTB
1.KAG.PUB	2.KEG.PUB

TOP PLATE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
77x67	100	32	90	135	33
77x67	125	32	100	161	35
90x70	100	32	90	135	33
90x70	125	32	100	161	35

Top plate dimensions shown on page 113.

Code-no.

Code-no.

Code-no.

1.KLA.PTB	2.KQA.PTB	5.K4A.PTB
1.KCA.PUB	2.KGA.PUB	5.J4A.PUB
1.KLO.PTB	2.KQO.PTB	5.K4L.PTB
1.KCO.PUB	2.KGO.PUB	5.J4L.PUB

SCREW



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
M 10 x 25	100	32	90	135	33
M 10 x 25	125	32	100	161	35
M 12 x 25	100	32	90	135	33
M 12 x 25	125	32	100	161	35

Code-no.

Code-no.

1.KKS.PTB	2.KPS.PTB
1.KBS.PUB	2.KFS.PUB
1.KK1.PTB	2.KP1.PTB
1.KB1.PUB	2.KF1.PUB

PLAIN STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
18 x 62	100	32	90	135	33
18 x 62	125	32	100	161	35

A list of adaptors for round and square tubing appears on page 112.

Code-no.

Code-no.


1.KMA.PTB	2.KRA.PTB
1.KDA.PUB	2.KHA.PUB



BALL BEARING WHEEL

- Non marking **electrically conductive**, grey thermoplastic rubber tyred
- Polypropylene hub
- Ball bearing
- Screwed axle
- Wheel-Ø 100 mm, 125 mm

FITTINGS

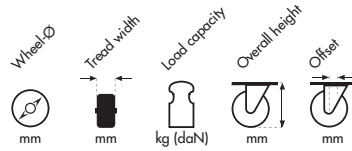

SERIES 850

SWIVEL CASTOR

SERIES 851

SWIVEL CASTOR WITH TOTAL LOCK

BOLT HOLE



mm	Wheel-Ø	Tread width	Load capacity	Overall height	Offset
10,3	100	32	90	135	33
10,3	125	32	100	161	35
12,8	100	32	90	135	33
12,8	125	32	100	161	35

See page 114.

Code-no.

Code-no.

1.KJA.PT0
1.KAA.PU0
1.KJG.PT0
1.KAG.PU0

2.KNA.PT0
2.KEA.PU0
2.KNG.PT0
2.KEG.PU0

TOP PLATE



mm	Wheel-Ø	Tread width	Load capacity	Overall height	Offset
77x67	100	32	90	135	33
77x67	125	32	100	161	35
90x70	100	32	90	135	33
90x70	125	32	100	161	35

Top plate dimensions shown on page 113.

Code-no.

Code-no.

1.KLA.PT0
1.KCA.PU0
1.KLO.PT0
1.KCO.PU0

2.KQA.PT0
2.KGA.PU0
2.KQO.PT0
2.KGO.PU0

SCREW



mm	Wheel-Ø	Tread width	Load capacity	Overall height	Offset
M 10 x 25	100	32	90	135	33
M 10 x 25	125	32	100	161	35
M 12 x 25	100	32	90	135	33
M 12 x 25	125	32	100	161	35

Code-no.

Code-no.

1.KKS.PT0
1.KBS.PU0
1.KK1.PT0
1.KB1.PU0

2.KPS.PT0
2.KFS.PU0
2.KP1.PT0
2.KF1.PU0

PLAIN STEM



mm	Wheel-Ø	Tread width	Load capacity	Overall height	Offset
18 x 62	100	32	90	135	33
18 x 62	125	32	100	161	35

Code-no.

Code-no.

1.KMA.PT0
1.KDA.PU0

2.KRA.PT0
2.KHA.PU0

A list of adaptors for round and square tubing appears on page 112.