



BALL BEARING WHEEL .PUK


- Non marking grey thermoplastic rubber tyred
- Polypropylene hub
- Thread guards
- Stainless steel ball bearing with polyamide housing
- Screwed rust free axle
- Wheel-Ø 125 mm



PLAIN BEARING WHEEL .JLW

- Non marking grey thermoplastic rubber tyred
- Polypropylene hub
- Stainless steel bush
- Screwed rust free axle
- Wheel-Ø 125 mm

FITTINGS

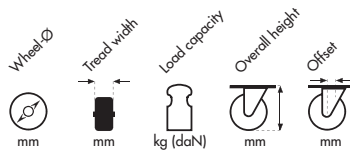

SERIES 850K

SWIVEL CASTOR

SERIES 856K

SWIVEL CASTOR WITH TOTAL LOCK

SERIES 854K

RIGID CASTOR

BOLT HOLE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
10,3	125	32	100	161	40
10,3	125	32	90	161	40

See page 114.

Code-no.

Code-no.

1.KA3.PUK

2.J0D.PUK

1.KA3.JLW

2.J0D.JLW

TOP PLATE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
95x70	125	32	100	161	40
95x70	125	32	90	161	40

Top plate dimensions shown on page 113.

Code-no.

Code-no.

Code-no.

1.KCW.PUK

2.J2W.PUK

1.KCW.JLW

2.J2W.JLW

5.J48.PUK

5.J48.JLW

PLAIN STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
18x62	125	32	100	161	40
18x62	125	32	90	161	40

A list of adaptors for round and square tubing appears on page 112.

Code-no.

Code-no.

Code-no.

1.KDF.PUK

2.J3F.PUK

1.KDF.JLW

2.J3F.JLW

5.J56.PUK

5.J56.JLW