

Bassick CASTERS FOR FOOD SERVICE AND FOOD HANDLING



Made in accordance with specifications of NSF Series NS68 Swivel

SERIES NS68 SWIVEL 3-1/2", 4" & 5" DIA. WHEELS


For use on Food Service Carts, Dish Carts, Process Tables, and Commercial Kitchen Equipment.

For food handling equipment made from tubing. Resilient tread wheels combine quiet, easy performance with floor protection.

Use with rubber expanding adapter kits to fit the most popular tubing sizes in the food handling field.

Bright Zinc Finish for corrosion resistance and clean appearance.

4" and 5" casters supplied with easy action step on side brake where shown with prefix "SB".

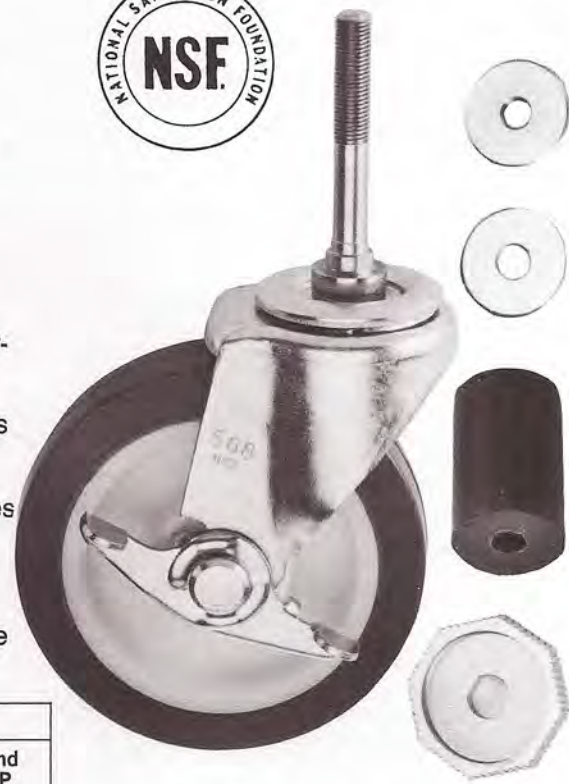

WHEEL			SWIVEL CASTER					
Dia. In.	Tread Width In.	Bearing Type	Load Cap. Lbs.	Caster Height In.	Swivel Radius In.	Approx. Weight Lbs.	Bassick No.	Stand EDP No.

BACO Wheel. Soft rubber tread molded to hard rubber core provides floor and load protection with quiet operation. Recommended for hand pushed equipment on hard floors.

3-1/2	1-5/16	Self Lube	140	5-1/32	3-1/16	2	NS35686 X973	15004
-------	--------	-----------	-----	--------	--------	---	--------------	-------

BRAVOTHANE Wheel. Tough, resilient polyurethane tread interlocked to polypropylene core. Provides quiet service with floor protection in hand pushed applications. Excellent resistance to corrosion.

4	1-1/4	Self Lube	250	5-1/8	3-1/2	2-1/2	NS4688P X973	15005
4	1-1/4	Self Lube	250	5-1/8	3-1/2	2-1/2	SBNS4688P X973	15022
5	1-1/4	Self Lube	250	6-1/8	4-5/32	2-3/4	NS5688PX973	15006
5	1-1/4	Self Lube	250	6-1/8	4-5/32	2-3/4	SBNS5688PX973	15023

RUBBER EXPANDING ADAPTER KITS

FITS TUBING I.D. RANGE	ADAPTER Bassick No.	Stand EDP No.
0.875" to 1.00"	EZ 7/8" Kit	15001
1.125" to 1.250"	EZ 1-1/8" Kit	15002
1.500" to 1.625"	EZ 1-1/2" Kit	15003

ECONOMICAL DOLLY CASTERS

Made to specifications of NSF

SERIES 61 SWIVEL, SERIES 38 RIGID 3" DIA. WHEELS

Husky casters for use in food service and food handling where heavy loads and intermittent service are anticipated and low first cost is essential.

SWIVEL: Single level, large diameter ball bearing swivel for economy and long life.

FINISH: Heavy zinc plate finish for rust prevention and bright appearance.



NS 3619

WHEELS			TOP PLATE					CASTER NO.				
Dia. In.	Tread Width In.	Bearing Type	Load Cap. Lbs.	Caster Height In.	Caster Type	Swivel Radius In.	Bolt Hole Spacing In.	Mount Bolt Dia. In.	Plate Size In.	Approx. Weight Lbs.	Bassick No.	Stand EDP No.

ALASITE Wheel. Water resistant, non-marking molded hard rubber combines high load capacity with easying rolling and floor protection.

3	1 1/4	Self Lube	210	3 11/16	Swivel Rigid	2 13/32	2 3/8 x 3 7/16	5/16	3 1/8 x 4 1/8	1 3/4	NS 3619	10140
						—	1 3/16 x 4		2 1/2 x 5	1 1/2	NS 3389	15065