

***Bassick* HONCHO 1200**

INDUSTRIAL AND MATERIAL HANDLING CASTERS

For platform trucks, fixture dollies, freight terminal trucks and cargo containers carrying up to 4,800 pounds in conveyor towed or hand pushed application.

SERIES ES SWIVEL, SERIES ER RIGID 5", 6" & 8" Dia. Wheels

Deep formed circular rib in top plate for added strength and stiffness.

Heat treat hardened bearing races and balls for easier swiveling and long life.

Husky king pin and large diameter bearing races for impact and abuse resistance.


Easily accessible but protected Alemite lubrication fitting for swivel bearing.

Steel hub cap retains lubricant in swivel bearing keeping wheel and floor clean.

Zinc chromate finish for corrosion resistance over double that of ordinary zinc plate.

Polymer plastic wheel bearing seals retain lubricant, exclude contaminants and reduce friction and wear between wheel hub and caster legs.

Easily accessible but protected Alemite lubrication fitting for wheel roller bearings.

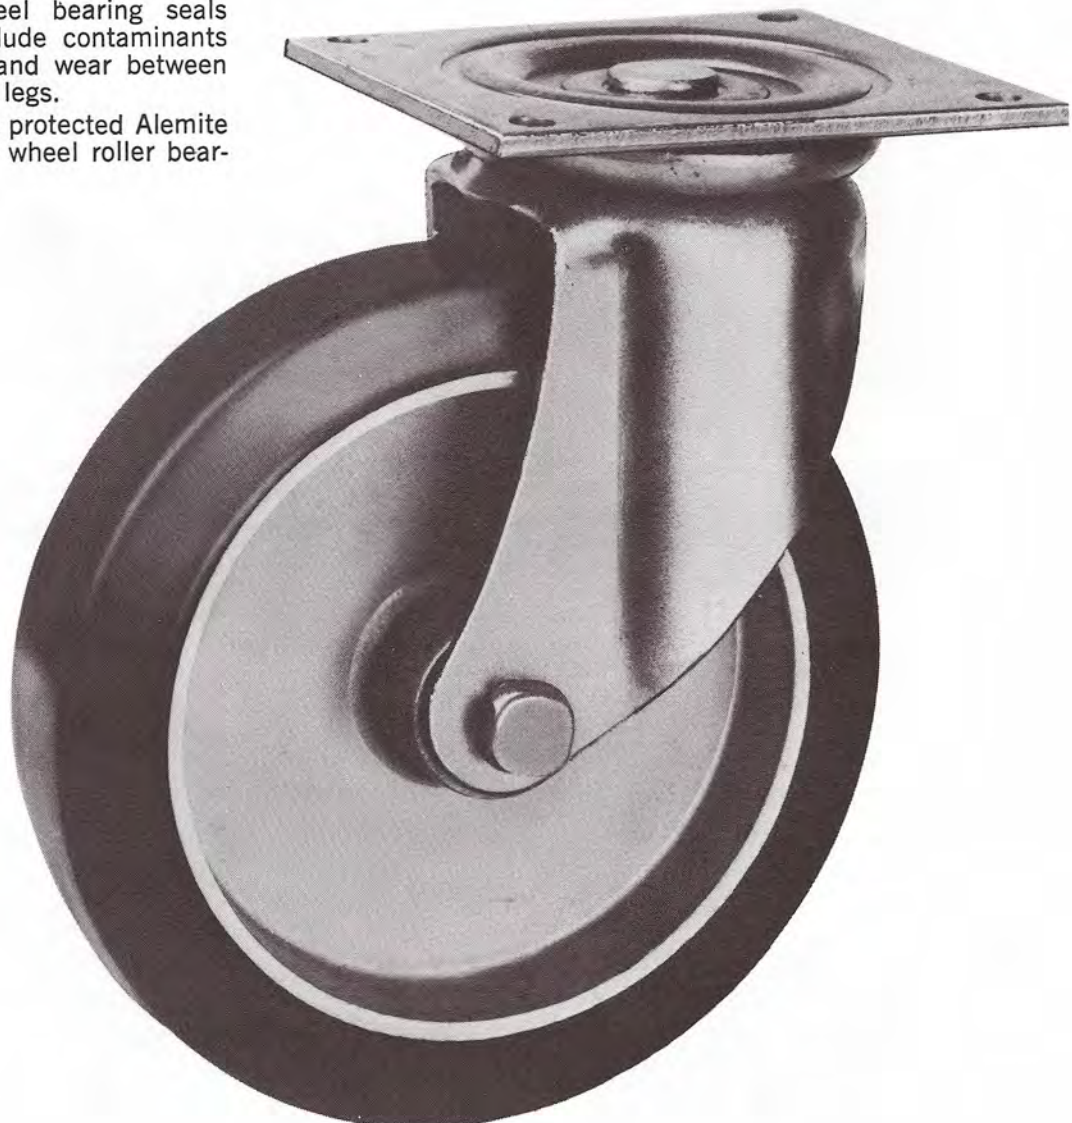

8ES3P-7

Bolt Hole spacing $4\frac{1}{8}$ " x $4\frac{1}{2}$ "
 Mounting bolt dia. $\frac{3}{8}$ "
 Top plate size 5" x $5\frac{1}{2}$ "



WHEEL			Load Cap. Lbs.	Caster Height In.	SWIVEL CASTER				RIGID CASTER		
Dia. In.	Tread Width In.	Bearing Type			Swivel Radius In.	Approx. Weight In.	Bassick No.	Stand. EDP No.	Approx. Weight Lbs.	Bassick No.	Stand. EDP No.

ALCORE/RUBBER TREAD WHEEL. Soft rubber tread bonded to aluminum core provides maximum floor and load protection, impact strength and quiet operation. Recommended for hand pushed or conveyor towed operation on hard floors.

5	2	Seal Roller	450	6½	4½	7	5ES3R-7	12354	5	5ER3R-7	12357
6	2	Seal Roller	500	7¾	5	8	6ES3R-7	12355	6	6ER3R-7	12358
8	2	Seal Roller	600	9½	6⅞	9½	8ES3R-7	12356	9	8ER3R-7	12359

HONCHO/POLYURETHANE Tread Wheel. Tough, resilient polyurethane mechanically interlocked to husky die cast aluminum core for extra abuse conditions.

5	2	Seal Roller	1050	6½	4½	7	5ES3P-7	12806	6	5ER3P-7	12805
6	2	Seal Roller	1200	7¾	5	7½	6ES3P-7	12815	6½	6ER3P-7	12814
8	2	Seal Roller	1200	9½	6⅞	9½	8ES3P-7	12829	8	8ER3P-7	12826

ATLASITE Wheel. Water resistant, non marking molded hard rubber wheel combines high load capacity and easy rolling with floor protection. Recommended for hand pushed equipment on hard floors and carpet.

5	2	Roller	600	6½	4½	7½	5ES9-2	11822	6	5ER9-2	11823
6	2	Roller	650	7¾	5	9	6ES9-2	11826	7½	6ER9-2	11827
8	2	Roller	750	9½	6⅞	11½	8ES9-2	11828	10	8ER9-2	11829

CANAPHIN WHEEL Phenolic resin plastic reinforced with new low water absorption macerated canvas. High load capacity, impact strength, floor protection and easy, quiet rolling. Resistant to many chemicals, acids, solvents, and water solutions. Operating temperatures from -40°F to +300°F. Clean, non-marking wheel for use on hand pushed and power towed equipment on hard, smooth floors or carpet. Supplied standard with sealed roller bearing in wheel.

5	2	Seal Roller	1000	6½	4½	7	5ES8-7	11830	5½	5ER8-7	11831
6	2	Seal Roller	1200	7¾	5	8	6ES8-7	11832	6	6ER8-7	11833
8	2	Seal Roller	1200	9½	6⅞	9	8ES8-7	11834	7½	8ER8-7	11835

SEMI-STEEL Wheel. Cast iron enriched with steel for high load capacity, easy rolling and resistance to rough and chip littered floors. Smooth, machined treads reduce floor damage and noise.

5	2	Roller	1200	6½	4½	9	5ES1-2	11802	7¼	5ER1-2	11803
6	2	Roller	1200	7¾	5	10½	6ES1-2	11806	9	6ER1-2	11807
8	2	Roller	1200	9½	6⅞	14	8ES1-2	11808	12¼	8ER1-2	11809