

Castors+Wheels

Series: LKPA-VPA, BKPA-VPA

Light duty swivel and fixed castors, heavy brackets

 60 - 110 kg




Brackets: LKPA/BKPA Series - Pressed steel, swivel bracket with double ball bearing in the swivel head, strong central kingpin, bolted wheel axle, zinc-plated.
Top plate drawings: Page 70.
Detailed description: Page 60 and 76.

Wheels: VPA Series - Tyres: Solid rubber, colour grey, non-marking, 80° shore A.
Rims: Plain bearing version made of high-quality nylon. Ball bearing version made of polypropylene. Shock and impact-resistant, corrosion-resistant, colour black.
Detailed description: Page 92 and 30.


3

Further information on the internet: www.blickle.de

Swivel castors		Fixed castors		Swivel castors with "stop-fix" brake							
Ref. No.	Ref. No.	Ref. No.	Wheel Ø [mm]	Tyre width [mm]	Load capacity [kg]	Bearing version	Total height [mm]	Plate size [mm]	Bolt hole spacing [mm]	Bolt hole Ø [mm]	Offset swvl castor [mm]
LKPA-VPA 80G	BKPA-VPA 80G	LKPA-VPA 80G-FI	80	25	60	Plain bearing	111	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 80K	BKPA-VPA 80K	LKPA-VPA 80K-FI	80	25	60	Ball bearing	111	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 101G	BKPA-VPA 101G	LKPA-VPA 101G-FI	100	32	90	Plain bearing	136	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 101K	BKPA-VPA 101K	LKPA-VPA 101K-FI	100	32	90	Ball bearing	136	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 125G	BKPA-VPA 125G	LKPA-VPA 125G-FI	125	25	80	Plain bearing	161	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 125K	BKPA-VPA 125K	LKPA-VPA 125K-FI	125	25	80	Ball bearing	161	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 126G	BKPA-VPA 126G	LKPA-VPA 126G-FI	125	32	100	Plain bearing	161	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 126K	BKPA-VPA 126K	LKPA-VPA 126K-FI	125	32	100	Ball bearing	161	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 150G	BKPA-VPA 150G	LKPA-VPA 150G-FI	150	32	110	Plain bearing	185	90 x 66	75x45/61x51	8,5	40
LKPA-VPA 150K	BKPA-VPA 150K	LKPA-VPA 150K-FI	150	32	110	Ball bearing	185	90 x 66	75x45/61x51	8,5	40



Variants / Accessories

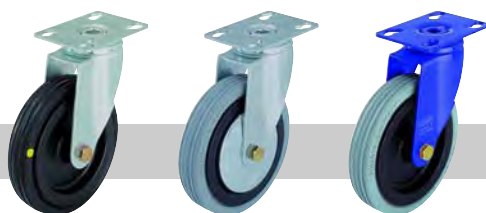

	Antistatic version, black tyre	With pressed steel thread guard, zinc-plated	With electrostatic powder coating
Technical description page	30	79	
Ref. No. extension	-EL	-FA	
Available for wheel Ø [mm]	All ball bearing versions	All sizes	Upon request