


Polytech Series

Polyurethane

Capacity 150 - 1050

Polytech Urethane wheels are manufactured from a high grade, abrasion resistant, solid polyurethane tread that is mechanically bonded to a heavy duty polyolefin core. These wheels are excellent for use in environments that are hostile to steel or phenolic wheels.

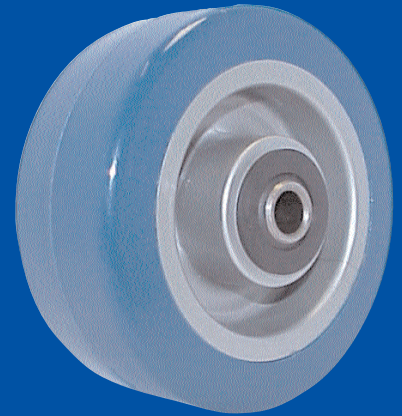

Features

- Non Marking
- Light Weight
- High Capacity
- Easily Cleaned
- Highly Impact Resistant
- Unaffected By Most Chemicals
- Temperature Range -20°F / +180°F
- Durometer 55 Shore D

Options

- Metal Washers
- Sealed Precision Bearings
- Available In Various Colors

Wheel Diameter	Tread Width	Load Capacity	Bore Size	Hub Length	Bearing Type	Part Number	Shipping Weight
4	1	150	5/16	1 1/8	Plain	90-06-035-02	0.4
	2	600	1/2	2 3/16	Delrin	90-46-009-02	1
			3/4	2 3/16	Delrin	90-56-009-02	
			3/4	2 3/16	Roller	90-26-009-02	
5	2	750	1 3/16	2 3/16	Plain	90-06-009-02	1.25
			1/2	2 3/16	Delrin	90-46-002-02	
			3/4	2 3/16	Delrin	90-56-002-02	
			3/4	2 3/16	Roller	90-26-002-02	
6	2	900	1 3/16	2 3/16	Plain	90-06-002-02	1.5
			1/2	2 3/16	Delrin	90-46-003-02	
			3/4	2 3/16	Delrin	90-56-003-02	
			3/4	2 3/16	Roller	90-26-003-02	
8	2	1000	1 3/16	2 3/16	Plain	90-06-003-02	2
			1/2	2 3/16	Delrin	90-46-004-02	
			3/4	2 3/16	Delrin	90-56-004-02	
			3/4	2 3/16	Roller	90-26-004-02	