


2 SERIES

Capacity up to 325 lbs each

Pipe Thread Stem

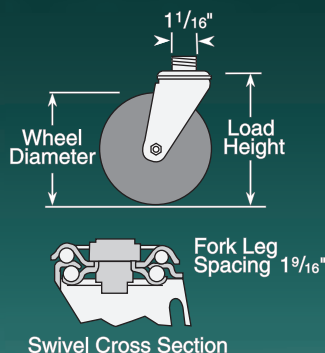

Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 3/8" hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Performance Options

Caster Brake

Total Lock Brake (See page 10)
Locks wheel and swivel simultaneously. Fits 3 1/2", 4" and 5" swivel models. Field installable (Specify **BRK5**).

Side Lock Brake (See page 10)
Available on all swivel models. Field installable (Specify **BRK1**).

Fork Option

NSF Listed (See page 1)
All models except thread guards and cast iron wheels (Specify **FSI**).

Dust Cap (See page 14)–Specify **DC1**.

Axle/Nut Options:

AX1 Zerk Axle
AX2 Solid Axle
NT1 Thick lock nut



Wheel Option

Thread Guards (See page 10) – Available on many models. (Specify **TG1** for metal **TG2** for plastic).

Standard Mounting:

Fits Standard 3/4" Pipe Coupling

The actual diameter of the threaded stem is approximately 1 1/16". The pipe thread stem screws directly into a standard pipe coupling for a rigid and permanent fit with full swivel action.

Easy Installation

The 7/16" hex nut beneath the lower raceway makes it fast and easy to install these casters on a wide variety of equipment.



Wheel Selection



PERFORMA
FLAT TREAD



PERFORMA
ROUND TREAD



PERFORMA
CONDUCTIVE FLAT



PERFORMA
CONDUCTIVE ROUND



POLYOLEFIN



THERMO



THERMOTECH



POLYURETHANE
HI-TECH



CAST IRON



RUBBER HI-TECH



PHENOLIC

2 SERIES • Pipe Thread Stem • Capacity up to 325 lbs


Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Stem Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2½"	1¼"	125	Performa Rubber (Conductive Flat)	Ball	2.02253.445 COND	4	2 13/32	1 3/4
		140	Performa Rubber (Flat tread)	Delrin	2.02253.441	4	2 13/32	1 3/4
			Performa Rubber (Flat tread)	Ball	2.02253.445	4	2 13/32	1 3/4
		200	Polyolefin	Delrin	2.02253.53	4	2 13/32	1 3/4
			Polyolefin	Ball	2.02253.55	4	2 13/32	1 3/4
		250	Polyurethane HI-TECH	Delrin	2.02253.91	4	2 13/32	1 1/2
			Polyurethane HI-TECH	Ball	2.02253.95	4	2 13/32	1 1/2
	1 7/16"	300	Cast Iron	Sleeve	2.02253.12	4	2 13/32	2 1/8
3"	1¼"	150	Rubber HI-TECH	Plain	2.03353.42	4 1/4	2 21/32	2
		200	Polyurethane HI-TECH	Plain	2.03353.92	4 1/4	2 21/32	2
			Polyolefin	Delrin	2.03353.52	4 1/4	2 21/32	2
	1 15/32"	300	Phenolic	Roller	2.03353.309	4 1/4	2 21/32	2 3/4
3½"	1 5/16"	210	Performa Rubber (Conductive Round)	Ball	2.03253.565 COND	4 13/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Delrin	2.03253.561	4 13/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Ball	2.03253.565	4 13/16	2 29/32	2 1/4
	1¼"	225	Performa Rubber (Conductive Flat)	Ball	2.03253.445 COND	4 13/16	2 29/32	2 1/4
			Polyolefin	Delrin	2.03253.53	4 13/16	2 29/32	2 1/8
			Polyolefin	Ball	2.03253.55	4 13/16	2 29/32	2 1/8
		250	Performa Rubber (Flat tread)	Delrin	2.03253.441	4 13/16	2 29/32	2 1/8
			Performa Rubber (Flat tread)	Ball	2.03253.445	4 13/16	2 29/32	2 1/8
			Polyurethane HI-TECH	Delrin	2.03253.91	4 13/16	2 29/32	1 3/4
			Polyurethane HI-TECH	Ball	2.03253.95	4 13/16	2 29/32	1 3/4
		300	Thermo	Plain	2.03253.52 HT	4 13/16	2 29/32	3 1/8
			Cast Iron	Sleeve	2.03253.12	4 13/16	2 29/32	3
4"	1¼"	250	ThermoTech	Teflon	2.04253.613 H	5 1/4	3 7/32	3
			Performa Rubber (Conductive Flat)	Ball	2.04253.445 COND	5 1/4	3 7/32	2 1/4
		275	Polyolefin	Delrin	2.04253.53	5 1/4	3 7/32	2 1/4
			Polyolefin	Ball	2.04253.55	5 1/4	3 7/32	2 1/4
			Polyurethane HI-TECH	Delrin	2.04253.91	5 1/4	3 7/32	2
			Polyurethane HI-TECH	Ball	2.04253.95	5 1/4	3 7/32	2
		300	Performa Rubber (Flat tread)	Delrin	2.04253.441	5 1/4	3 7/32	2 1/4
			Performa Rubber (Flat tread)	Ball	2.04253.445	5 1/4	3 7/32	2 1/4
			Thermo	Plain	2.04253.52 HT	5 1/4	3 7/32	3 1/4
			Cast Iron	Sleeve	2.04253.12	5 1/4	3 7/32	3 1/2
5"	1¼"	250	ThermoTech	Teflon	2.05253.613H	6 5/16	3 13/16	3
			Performa Rubber (Conductive Flat)	Ball	2.05253.445 COND	6 5/16	3 13/16	3
	1 5/16"	250	Performa Rubber (Conductive Round)	Ball	2.05253.565 COND	6 5/16	3 13/16	3
			Performa Rubber (Round tread)	Delrin	2.05253.561	6 5/16	3 13/16	3
	1¼"	300	Performa Rubber (Round tread)	Ball	2.05253.565	6 5/16	3 13/16	3
			Polyolefin	Delrin	2.05253.53	6 5/16	3 13/16	2 3/4
			Polyolefin	Ball	2.05253.55	6 5/16	3 13/16	2 3/4
			Polyurethane HI-TECH	Delrin	2.05253.91	6 5/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Ball	2.05253.95	6 5/16	3 13/16	2 1/2
			Cast Iron	Sleeve	2.05253.12	6 5/16	3 13/16	3 3/4
		325	Performa Rubber (Flat tread)	Delrin	2.05253.441	6 5/16	3 13/16	2 3/4
			Performa Rubber (Flat tread)	Ball	2.05253.445	6 5/16	3 13/16	2 3/4
			Thermo	Plain	2.05253.52 HT	6 5/16	3 13/16	3 3/4

2 SERIES

2 SERIES

Capacity up to 325 lbs each

Expanding Adapter Stem

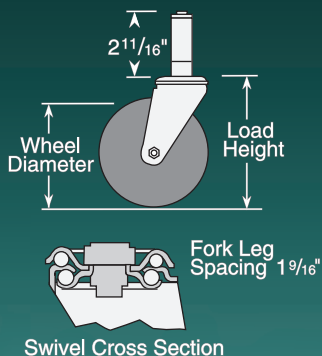

Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 3/8" hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Performance Options

Mounting Options

Inside Diameter of Tube	Mounting Code Numbers	
	Round Tubing	Square Tubing
3/4" - 13/16"	MTG40	-
7/8" - 15/16"	MTG41	MTG51
1" - 1 1/16"	MTG42	MTG52
1 1/8" - 1 3/16"	MTG43	MTG53
1 1/4" - 1 5/16"	MTG44	MTG54
1 3/8" - 1 7/16"	MTG45	MTG55
1 1/2" - 1 9/16"	MTG46	-
1 5/8" - 1 11/16"	MTG47	-

Stems are 2 11/16" long. Stem size less adapter: 1/2" - 13UNC x 2 11/16"

Caster Brake

Total Lock Brake (See page 10)
Locks wheel and swivel simultaneously. Fits 3 1/2", 4" and 5" swivel models. Field installable (Specify **BRK5**).

Side Lock Brake (See page 10)
Available on all swivel models. Field installable (Specify **BRK1**).

Fork Option

NSF Listed (See page 1)
All models except thread guards and cast iron wheels (Specify **FSI**).

Swivel Dust Cap (See page 10)
Specify **DC1**.

Axle/Nut Options:

AX1 Zerk Axle
AX2 Solid Axle
NT1 Thick lock nut



Wheel Option

Thread Guards (See page 14)
Available on many models (Specify **TG1** for metal **TG2** for plastic).

Standard Mounting:

Turning of hex nut beneath lower raceway expands rubber adapter inside of round or square tubing for a tight, permanent fit. To order, select caster model number and specify stem adapter size by code number from mounting option chart at right.



Wheel Selection



PERFORMA
FLAT TREAD



PERFORMA
ROUND TREAD



POLYOLEFIN



POLYURETHANE
HI-TECH



CAST IRON



RUBBER HI-TECH



PHENOLIC

Note: Expanding adapter temperature rating is at 180°F.

2 SERIES • Expanding Adapter Stem • Capacity up to 325 lbs


Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Stem Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2½"	1¼"	140	Performa Rubber (Flat tread)	Delrin	2.02267.441	4	2 13/32	1 3/4
			Performa Rubber (Flat tread)	Ball	2.02267.445	4	2 13/32	1 3/4
		200	Polyolefin	Delrin	2.02267.53	4	2 13/32	1 3/4
			Polyolefin	Ball	2.02267.55	4	2 13/32	1 3/4
		250	Polyurethane HI-TECH	Delrin	2.02267.91	4	2 13/32	1 1/2
			Polyurethane HI-TECH	Ball	2.02267.95	4	2 13/32	1 1/2
	1 7/16"	300	Cast Iron	Sleeve	2.02267.12	4	2 13/32	2 1/8
		300	Phenolic	Roller	2.02267.319	4	2 13/32	1 3/4
3"	1¼"	150	Rubber HI-TECH	Plain	2.03367.42	4 1/4	2 21/32	2
		200	Polyurethane HI-TECH	Plain	2.03367.92	4 1/4	2 21/32	2
			Polyolefin	Delrin	2.03367.52	4 1/4	2 21/32	2
	1 15/32"	300	Phenolic	Roller	2.03367.309	4 1/4	2 21/32	2 3/4
3½"	1 5/16"	210	Performa Rubber (Round tread)	Delrin	2.03267.561	4 9/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Ball	2.03267.565	4 9/16	2 29/32	2 1/4
	1 1/4"	230	Polyolefin	Delrin	2.03267.53	4 9/16	2 29/32	2 1/8
			Polyolefin	Ball	2.03267.55	4 9/16	2 29/32	2 1/8
		250	Performa Rubber (Flat tread)	Delrin	2.03267.441	4 9/16	2 29/32	2 1/8
			Performa Rubber (Flat tread)	Ball	2.03267.445	4 9/16	2 29/32	2 1/8
			Polyurethane HI-TECH	Delrin	2.03267.91	4 9/16	2 29/32	1 3/4
			Polyurethane HI-TECH	Ball	2.03267.95	4 9/16	2 29/32	1 3/4
		300	Cast Iron	Sleeve	2.03267.12	4 9/16	2 29/32	3
4"	1 1/4"	275	Polyolefin	Delrin	2.04267.53	5 1/4	3 7/32	2 1/4
			Polyolefin	Ball	2.04267.55	5 1/4	3 7/32	2 1/4
			Polyurethane HI-TECH	Delrin	2.04267.91	5 1/4	3 7/32	2
			Polyurethane HI-TECH	Ball	2.04267.95	5 1/4	3 7/32	2
		300	Performa Rubber (Flat tread)	Delrin	2.04267.441	5 1/4	3 7/32	2 1/4
			Performa Rubber (Flat tread)	Ball	2.04267.445	5 1/4	3 7/32	2 1/4
			Cast Iron	Sleeve	2.04267.12	5 1/4	3 7/32	3 1/2
5"	1 5/16"	250	Performa Rubber (Round tread)	Delrin	2.05267.561	6 5/16	3 13/16	3
			Performa Rubber (Round tread)	Ball	2.05267.565	6 5/16	3 13/16	3
	1 1/4"	300	Polyolefin	Delrin	2.05267.53	6 5/16	3 13/16	2 3/4
			Polyolefin	Ball	2.05267.55	6 5/16	3 13/16	2 3/4
			Polyurethane HI-TECH	Delrin	2.05267.91	6 5/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Ball	2.05267.95	6 5/16	3 13/16	2 1/2
			Cast Iron	Sleeve	2.05267.12	6 5/16	3 13/16	3 3/4
		325	Performa Rubber (Flat tread)	Delrin	2.05267.441	6 5/16	3 13/16	2 3/4
			Performa Rubber (Flat tread)	Ball	2.05267.445	6 5/16	3 13/16	2 3/4

2 SERIES

2 SERIES

Capacity up to 325 lbs each

Grip Ring Stem

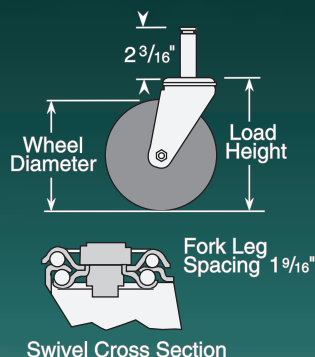

Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 3/8" hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Performance Options

Mounting Options

Round Stems

MTG5: 2³/₁₆" long x 3/4" dia. (.75)

MTG6: 2³/₁₆" long x 13/16" dia. (.812)

MTG7: 2³/₁₆" long x 27/32" dia. (.845)

MTG8: 2³/₁₆" long x 7/8" dia. (.865)

MTG9: 2³/₁₆" long x 1" dia. (1.00)

Standard Mounting:

Standard grip ring stem is 2³/₁₆" long with 5/8" diameter. Stem features spring grip at top to hold caster securely in tubing. Assures tight fit and easy swivel action.

Caster Brake

Total Lock Brake (See page 10)

Locks wheel and swivel simultaneously. Fits 3 1/2", 4" and 5" swivel models. Field installable. **Note:** When mounted in tubing, brake will function as wheel brake only. (Specify **BRK5**).

Side Lock Brake (See page 10)

Available on all swivel models. Field installable (Specify **BRK1**).

Fork Option

NSF Listed (See page 1)

All models except thread guards and cast iron wheels (Specify **FSI**).

Swivel Dust Cap (See page 14)

Specify **DC1**.

Axle/Nut Options:

AX1 Zerk Axle

AX2 Solid Axle

NT1 Thick lock nut



Wheel Option

Thread Guards (See page 14) – Available on many models. (Specify **TG1** for metal **TG2** for plastic).

Wheel Selection



PERFORMA
FLAT TREAD



PERFORMA
ROUND TREAD



PERFORMA
CONDUCTIVE FLAT



PERFORMA
CONDUCTIVE ROUND



POLYOLEFIN



THERMO



THERMOTECH



POLYURETHANE
HI-TECH



CAST IRON



RUBBER HI-TECH



PHENOLIC

2 SERIES • Grip Ring Stem • Capacity up to 325 lbs


Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Stem Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2½"	1¼"	125	Performa Rubber (Conductive Flat)	Ball	2.02251.445 COND	3¾/4	2 13/32	1¾/4
		140	Performa Rubber (Flat tread)	Delrin	2.02251.441	3¾/4	2 13/32	1¾/4
			Performa Rubber (Flat tread)	Ball	2.02251.445	3¾/4	2 13/32	1¾/4
		200	Polyolefin	Delrin	2.02251.53	3¾/4	2 13/32	1¾/4
			Polyolefin	Ball	2.02251.55	3¾/4	2 13/32	1¾/4
		250	Polyurethane HI-TECH	Delrin	2.02251.91	3¾/4	2 13/32	1½/2
			Polyurethane HI-TECH	Ball	2.02251.95	3¾/4	2 13/32	1½/2
	1 7/16"	300	Cast Iron	Sleeve	2.02251.12	3¾/4	2 13/32	2 1/8
		300	Phenolic	Roller	2.02251.319	3¾/4	2 13/32	1¾/4
3"	1¼"	150	Rubber HI-TECH	Plain	2.03351.42	4	2 21/32	2
		200	Polyurethane HI-TECH	Plain	2.03351.92	4	2 21/32	2
			Polyolefin	Delrin	2.03351.52	4	2 21/32	2
	1 15/32"	300	Phenolic	Roller	2.03351.309	4	2 21/32	2¾/4
3½"	1 5/16"	210	Performa Rubber (Conductive Round)	Ball	2.03251.565 COND	4 9/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Delrin	2.03251.561	4 9/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Ball	2.03251.565	4 9/16	2 29/32	2 1/4
	1¼"	225	Performa Rubber (Conductive Flat)	Ball	2.03251.445 COND	4 9/16	2 29/32	2
			Polyolefin	Delrin	2.03251.53	4 9/16	2 29/32	2 1/8
			Polyolefin	Ball	2.03251.55	4 9/16	2 29/32	2 1/8
		250	Performa Rubber (Flat tread)	Delrin	2.03251.441	4 9/16	2 29/32	2 1/8
			Performa Rubber (Flat tread)	Ball	2.03251.445	4 9/16	2 29/32	2 1/8
			Polyurethane HI-TECH	Delrin	2.03251.91	4 9/16	2 29/32	1¾/4
		300	Polyurethane HI-TECH	Ball	2.03251.95	4 9/16	2 29/32	1¾/4
			Thermo	Plain	2.03251.52 HT	4 9/16	2 29/32	2 7/8
			Cast Iron	Sleeve	2.03251.12	4 9/16	2 29/32	3
4"	1¼"	250	ThermoTech	Teflon	2.04251.613 H	5	3 7/32	3
			Performa Rubber (Conductive Flat)	Ball	2.04251.445 COND	5	3 7/32	2 1/4
		275	Polyolefin	Delrin	2.04251.53	5	3 7/32	2 1/4
			Polyolefin	Ball	2.04251.55	5	3 7/32	2 1/4
			Polyurethane HI-TECH	Delrin	2.04251.91	5	3 7/32	2
			Polyurethane HI-TECH	Ball	2.04251.95	5	3 7/32	2
		300	Performa Rubber (Flat tread)	Delrin	2.04251.441	5	3 7/32	2 1/4
			Performa Rubber (Flat tread)	Ball	2.04251.445	5	3 7/32	2 1/4
			Thermo	Plain	2.04251.52 HT	5	3 7/32	3 1/8
			Cast Iron	Sleeve	2.04251.12	5	3 7/32	3 1/2
5"	1¼"	250	ThermoTech	Teflon	2.05251.613 H	6 1/16	3 13/16	3
			Performa Rubber (Conductive Flat)	Ball	2.05251.445 COND	6 1/16	3 13/16	3
	1 5/16"	250	Performa Rubber (Conductive Round)	Ball	2.05251.565 COND	6 1/16	3 13/16	3
			Performa Rubber (Round tread)	Delrin	2.05251.561	6 1/16	3 13/16	3
			Performa Rubber (Round tread)	Ball	2.05251.565	6 1/16	3 13/16	3
	1¼"	300	Polyolefin	Delrin	2.05251.53	6 1/16	3 13/16	2¾/4
			Polyolefin	Ball	2.05251.55	6 1/16	3 13/16	2¾/4
			Polyurethane HI-TECH	Delrin	2.05251.91	6 1/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Ball	2.05251.95	6 1/16	3 13/16	2 1/2
			Cast Iron	Sleeve	2.05251.12	6 1/16	3 13/16	3¾/4
		325	Performa Rubber (Flat tread)	Delrin	2.05251.441	6 1/16	3 13/16	2¾/4
			Performa Rubber (Flat tread)	Ball	2.05251.445	6 1/16	3 13/16	2¾/4
			Thermo	Plain	2.05251.52 HT	6 1/16	3 13/16	3 1/2

2 SERIES

2 SERIES

Capacity up to 325 lbs each

Straight Thread Stem



Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 3/8" hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Performance Options

Mounting Options

- MTG10:** 1/2"-13UNC x 3/4" long threaded
- MTG11:** 1/2"-13UNC x 1" long threaded
- MTG12:** 1/2"-20UNF x 3/4" long threaded
- MTG13:** 5/8"-11UNC x 1 3/4" long threaded
- MTG14:** 5/8"-18UNF x 1 3/4" long threaded
- MTG15:** 3/4"-10UNC x 1 3/4" long threaded
- MTG50:** 1/2"-20UNF x 1 1/2" long threaded

Caster Brake

- Total Lock Brake** (See page 10)
Locks wheel and swivel simultaneously. Fits 3 1/2", 4" and 5" swivel models. Field installable (Specify **BRK5**).
- Side Lock Brake** (See page 10)
Available on all swivel models. Field installable (Specify **BRK1**).

Fork Option

- NSF Listed** (See page 1)
All models except thread guards and cast iron wheels (Specify **FSI**).
- Swivel Dust Cap** (See page 14)
Specify **DC1**.
- Axle/Nut Options:**
AX1 Zerk Axle
AX2 Solid Axle
NT1 Thick lock nut



Wheel Option

- Thread Guards** (See page 14) – Available on many models. (Specify **TG1** for metal **TG2** for plastic).

Standard Mounting (MTG 53):

1/2" diameter – 13UNC X 1 1/2" long, threaded 1 3/8".

Easy Installation:


The 7/16" hex nut beneath the lower raceway makes it fast and easy to install these casters on a wide variety of equipment.



Shopping Cart Caster



Wheel Selection

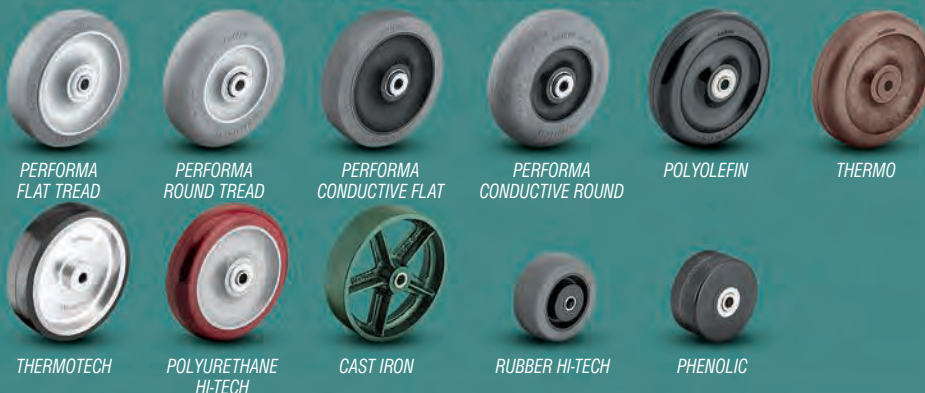

IMPORTANT: If caster stem is to be screwed into customer equipment, the customer must add a washer to the stem that will cover the incomplete threads and support the upper race. The stem shoulder must fit tightly against the customer equipment.

Colson Performa Shopping Cart Casters feature a cushion ride, quiet operation and sealed bearings. Stem size: 1/2" dia-13 x 7/8" long (keyed).

2 SERIES • Straight Thread Stem • Capacity up to 325 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Stem Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2½"	1¼"	125	Performa Rubber (Conductive Flat)	Ball	2.02254.445 COND	3¾	2 13/32	1 3/4
		140	Performa Rubber (Flat tread)	Delrin	2.02254.441	3¾	2 13/32	1 3/4
			Performa Rubber (Flat tread)	Ball	2.02254.445	3¾	2 13/32	1 3/4
		200	Polyolefin	Delrin	2.02254.53	3¾	2 13/32	1 3/4
			Polyolefin	Ball	2.02254.55	3¾	2 13/32	1 3/4
		250	Polyurethane HI-TECH	Delrin	2.02254.91	3¾	2 13/32	1 1/2
			Polyurethane HI-TECH	Ball	2.02254.95	3¾	2 13/32	1 1/2
	1 7/16"	300	Cast Iron	Sleeve	2.02254.12	3¾	2 13/32	2 1/8
3"	1¼"	150	Rubber HI-TECH	Plain	2.03354.42	4	2 21/32	2
		200	Polyurethane HI-TECH	Plain	2.03354.92	4	2 21/32	2
			Polyolefin	Delrin	2.03354.52	4	2 21/32	2
	1 15/32"	300	Phenolic	Roller	2.03354.309	4	2 21/32	2 3/4
3½"	1 5/16"	210	Performa Rubber (Conductive Round)	Ball	2.03254.565 COND	4 9/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Delrin	2.03254.561	4 9/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Ball	2.03254.565	4 9/16	2 29/32	2 1/4
	1¼"	225	Performa Rubber (Conductive Flat)	Ball	2.03254.445 COND	4 9/16	2 29/32	2
			Polyolefin	Delrin	2.03254.53	4 9/16	2 29/32	2 1/8
			Polyolefin	Ball	2.03254.55	4 9/16	2 29/32	2 1/8
		250	Performa Rubber (Flat tread)	Delrin	2.03254.441	4 9/16	2 29/32	2 1/8
			Performa Rubber (Flat tread)	Ball	2.03254.445	4 9/16	2 29/32	2 1/8
			Polyurethane HI-TECH	Delrin	2.03254.91	4 9/16	2 29/32	1 3/4
			Polyurethane HI-TECH	Ball	2.03254.95	4 9/16	2 29/32	1 3/4
		300	Thermo	Plain	2.03254.52 HT	4 9/16	2 29/32	3 1/8
			Cast Iron	Sleeve	2.03254.12	4 9/16	2 29/32	3
4"	1¼"	250	ThermoTech	Teflon	2.04254.613 H	5	3 7/32	3
			Performa Rubber (Conductive Flat)	Ball	2.04254.445 COND	5	3 7/32	2 1/4
		275	Polyolefin	Delrin	2.04254.53	5	3 7/32	2 1/4
			Polyolefin	Ball	2.04254.55	5	3 7/32	2 1/4
			Polyurethane HI-TECH	Delrin	2.04254.91	5	3 7/32	2
			Polyurethane HI-TECH	Ball	2.04254.95	5	3 7/32	2
		300	Performa Rubber (Flat tread)	Delrin	2.04254.441	5	3 7/32	2 1/4
			Performa Rubber (Flat tread)	Ball	2.04254.445	5	3 7/32	2 1/4
			Thermo	Plain	2.04254.52 HT	5	3 7/32	3 1/4
			Cast Iron	Sleeve	2.04254.12	5	3 7/32	3 1/2
5"	1¼"	250	ThermoTech	Teflon	2.05254.613 H	6 1/16	3 13/16	3
			Performa Rubber (Conductive Flat)	Ball	2.05254.445 COND	6 1/16	3 13/16	3
	1 5/16"	250	Performa Rubber (Conductive Round)	Ball	2.05254.565 COND	6 1/16	3 13/16	3
			Performa Rubber (Round tread)	Delrin	2.05254.561	6 1/16	3 13/16	3
			Performa Rubber (Round tread)	Ball	2.05254.565	6 1/16	3 13/16	3
	1¼"	300	Polyolefin	Delrin	2.05254.53	6 1/16	3 13/16	2 3/4
			Polyolefin	Ball	2.05254.55	6 1/16	3 13/16	2 3/4
			Polyurethane HI-TECH	Delrin	2.05254.91	6 1/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Ball	2.05254.95	6 1/16	3 13/16	2 1/2
		325	Cast Iron	Sleeve	2.05254.12	6 1/16	3 13/16	3 3/4
			Performa Rubber (Flat tread)	Delrin	2.05254.441	6 1/16	3 13/16	2 3/4
			Performa Rubber (Flat tread)	Ball	2.05254.445	6 1/16	3 13/16	2 3/4
			Thermo	Plain	2.05254.52 HT	6 1/16	3 13/16	3 3/4

New Performa® Shopping Cart Caster


Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Shopping Cart Caster Model	Load Height	Swivel Radius	Weight (Pounds)
5"	1¼"	225	Performa Rubber (Blue Flat Tread)	Sealed Ball	2.05554.448	5 7/8	4 1/16	1 1/2

Conductive wheel option: Consult factory.

2 SERIES

Capacity up to 325 lbs each

Square Stem Swivel & Rigid

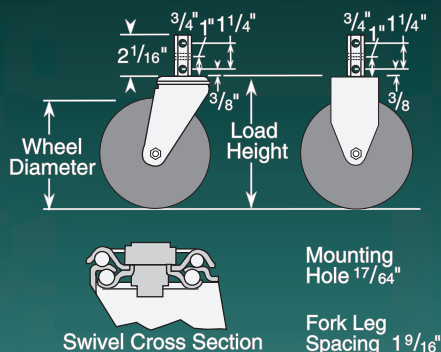

Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- $\frac{3}{8}$ " hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Performance Options

Mounting Options


Square Stem

MTG1: $2\frac{1}{16}$ " long x $\frac{7}{8}$ " square with 1 mounting hole $\frac{17}{64}$ " diameter (Specify **MTG1**).

MTG4 (Grip ring): $2\frac{3}{16}$ " long x $\frac{7}{8}$ " square (.865) (Specify **MTG4**).

Octagon Stem

$2\frac{1}{16}$ " long x $\frac{3}{4}$ " octagon with 3 mounting holes $\frac{17}{64}$ " diameter (Specify **MTG3**).



Caster Brake

Total Lock Brake (See page 10)
Locks wheel and swivel simultaneously. Fits $3\frac{1}{2}$ ", 4" and 5" swivel models. Field installable (Specify **BRK5**).

Side Lock Brake (See page 10)
Available on all swivel models. Field installable (Specify **BRK1**).

Fork Option

NSF Listed (See page 1)
All models except thread guards and cast iron wheels (Specify **FSI**).

Swivel Dust Cap (See page 14)
Specify **DC1**.

Axle/Nut Options:

AX1 Zerk Axle
AX2 Solid Axle
NT1 Thick lock nut



Wheel Option

Thread Guards (See page 14)
Available on many models (Specify **TG1** for metal **TG2** for plastic).

Standard Mounting:

$2\frac{1}{16}$ " long x $\frac{3}{4}$ " square with 3 mounting holes $\frac{17}{64}$ " diameter. Designed for easy installation on the inside of angle iron legs or against flat surfaces. Stems may be bolted or riveted against any flat vertical surface.

Wheel Selection



PERFORMA
FLAT TREAD



PERFORMA
ROUND TREAD



PERFORMA
CONDUCTIVE FLAT



PERFORMA
CONDUCTIVE ROUND



POLYOLEFIN



THERMO



THERMOTEC



POLYURETHANE
HI-TECH



CAST IRON



RUBBER HI-TECH



PHENOLIC

2 SERIES • Square Stem Swivel & Rigid • Capacity up to 325 lbs


Capacity Each (Pounds)			Wheel Descriptions	Wheel Bearing	Swivel Caster Models	Rigid Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2½"	1¼"	125	Performa Rubber (Conductive Flat)	Ball	2.02270.445 COND	2.02280.445 COND	3¾	2 13/32	1 5/8
		140	Performa Rubber (Flat tread)	Delrin	2.02270.441	2.02280.441	3¾	2 13/32	1 5/8
			Performa Rubber (Flat tread)	Ball	2.02270.445	2.02280.445	3¾	2 13/32	1 5/8
		200	Polyolefin	Delrin	2.02270.53	2.02280.53	3¾	2 13/32	1 5/8
			Polyolefin	Ball	2.02270.55	2.02280.55	3¾	2 13/32	1 5/8
		250	Polyurethane HI-TECH	Delrin	2.02270.91	2.02280.91	3¾	2 13/32	1 5/8
	Polyurethane HI-TECH		Ball	2.02270.95	2.02280.95	3¾	2 13/32	1 5/8	
	1 7/16"	300	Cast Iron	Sleeve	2.02270.12	2.02280.12	3¾	2 13/32	2
300		Phenolic	Roller	2.02270.319	2.02280.319	3¾	2 13/32	1 5/8	
3"	1¼"	150	Rubber HI-TECH	Plain	2.03370.42	2.03380.42	4	2 21/32	2
		200	Polyurethane HI-TECH	Plain	2.03370.92	2.03380.92	4	2 21/32	2
			Polyolefin	Delrin	2.03370.52	2.03380.52	4	2 21/32	2
	1 15/32"	300	Phenolic	Roller	2.03370.309	2.03380.309	4	2 21/32	2 3/4
3½"	1 5/16"	210	Performa Rubber (Conductive Round)	Ball	2.03270.565 COND	2.03280.565 COND	4 9/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Delrin	2.03270.561	2.03280.561	4 9/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Ball	2.03270.565	2.03280.565	4 9/16	2 29/32	2 1/4
	1¼"	225	Performa Rubber (Conductive Flat)	Ball	2.03270.445 COND	2.03280.445 COND	4 9/16	2 29/32	2
			Polyolefin	Delrin	2.03270.53	2.03280.53	4 9/16	2 29/32	1 7/8
		230	Polyolefin	Ball	2.03270.55	2.03280.55	4 9/16	2 29/32	1 7/8
			250	Performa Rubber (Flat tread)	Delrin	2.03270.441	2.03280.441	4 9/16	2 29/32
		Performa Rubber (Flat tread)		Ball	2.03270.445	2.03280.445	4 9/16	2 29/32	2
		Polyurethane HI-TECH		Delrin	2.03270.91	2.03280.91	4 9/16	2 29/32	2 7/8
		Polyurethane HI-TECH		Ball	2.03270.95	2.03280.95	4 9/16	2 29/32	2 7/8
		300	Thermo	Plain	2.03270.52 HT	2.03280.52 HT	4 9/16	2 29/32	2 7/8
	Cast Iron		Sleeve	2.03270.12	2.03280.12	4 9/16	2 29/32	3	
4"	1¼"	250	ThermoTech	Teflon	2.04270.613 H	2.04280.613 H	5	3 7/32	3
			Performa Rubber (Conductive Flat)	Ball	2.04270.445 COND	2.04280.445 COND	5	3 7/32	2 1/4
		275	Polyolefin	Delrin	2.04270.53	2.04280.53	5	3 7/32	2 1/8
			Polyolefin	Ball	2.04270.55	2.04280.55	5	3 7/32	2 1/8
			Polyurethane HI-TECH	Delrin	2.04270.91	2.04280.91	5	3 7/32	2 1/8
			Polyurethane HI-TECH	Ball	2.04270.95	2.04280.95	5	3 7/32	2 1/8
		300	Performa Rubber (Flat tread)	Delrin	2.04270.441	2.04280.441	5	3 7/32	2 1/4
			Performa Rubber (Flat tread)	Ball	2.04270.445	2.04280.445	5	3 7/32	2 1/4
			Thermo	Plain	2.04270.52 HT	2.04280.52 HT	5	3 7/32	3 1/8
Cast Iron	Sleeve		2.04270.12	2.04280.12	5	3 7/32	3 3/8		
5"	1¼"	250	ThermoTech	Teflon	2.05270.613 H	2.05280.613 H	6 1/16	3 13/16	3
			Performa Rubber (Conductive Flat)	Ball	2.05270.445 COND	2.05280.445 COND	6 1/16	3 13/16	3
	1 5/16"	250	Performa Rubber (Conductive Round)	Ball	2.05270.565 COND	2.05280.565 COND	6 1/16	3 13/16	3
			Performa Rubber (Round tread)	Delrin	2.05270.561	2.05280.561	6 1/16	3 13/16	3
			Performa Rubber (Round tread)	Ball	2.05270.565	2.05280.565	6 1/16	3 13/16	3
			Polyolefin	Delrin	2.05270.53	2.05280.53	6 1/16	3 13/16	2 1/2
	1¼"	300	Polyolefin	Ball	2.05270.55	2.05280.55	6 1/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Delrin	2.05270.91	2.05280.91	6 1/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Ball	2.05270.95	2.05280.95	6 1/16	3 13/16	2 1/2
			Cast Iron	Sleeve	2.05270.12	2.05280.12	6 1/16	3 13/16	3 3/4
		325	Performa Rubber (Flat tread)	Delrin	2.05270.441	2.05280.441	6 1/16	3 13/16	2 3/4
			Performa Rubber (Flat tread)	Ball	2.05270.445	2.05280.445	6 1/16	3 13/16	2 3/4
Thermo			Plain	2.05270.52 HT	2.05280.52 HT	6 1/16	3 13/16	3 1/2	

2 SERIES

2 SERIES

Capacity up to 325 lbs each

Modular Stem



Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 3/8" hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Standard Mounting:

Colson modular stem casters feature a 1/2" hollow rivet which will accept a wide variety of mounting stems (even a standard 1/2" bolt will work). You can supply the mounting fasteners or stems—we supply the casters.

Performance Options

Caster Brake

Total Lock Brake (See page 10)
Locks wheel and swivel simultaneously. Fits 3 1/2", 4" and 5" swivel models. Field installable (Specify **BRK5**).

Side Lock Brake (See page 10)
Available on all swivel models. Field installable (Specify **BRK1**).

Fork Option

NSF Listed (See page 1)
All models except thread guards and cast iron wheels (Specify **FSI**).

Swivel Dust Cap (See page 14)
Specify **DC1**.

Axle/Nut Options:

AX1 Zerk Axle
AX2 Solid Axle
NT1 Thick lock nut



Wheel Option

Thread Guards (See page 14)
Available on many models. (Specify **TG1** for metal **TG2** for plastic).

Wheel Selection



PERFORMA
FLAT TREAD



PERFORMA
ROUND TREAD



PERFORMA
CONDUCTIVE FLAT



PERFORMA
CONDUCTIVE ROUND



POLYOLEFIN



THERMO



THERMOTECH



POLYURETHANE
HI-TECH



CAST IRON



RUBBER HI-TECH



PHENOLIC

2 SERIES • Modular Stem • Capacity up to 325 lbs


Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Stem Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2½"	1¼"	125	Performa Rubber (Conductive Flat)	Ball	2.02250.445 COND	3¾	2 13/32	1 1/2
		140	Performa Rubber (Flat tread)	Delrin	2.02250.441	3¾	2 13/32	1 1/2
			Performa Rubber (Flat tread)	Ball	2.02250.445	3¾	2 13/32	1 1/2
		200	Polyolefin	Delrin	2.02250.53	3¾	2 13/32	1 1/2
			Polyolefin	Ball	2.02250.55	3¾	2 13/32	1 1/2
		250	Polyurethane HI-TECH	Delrin	2.02250.91	3¾	2 13/32	1 1/4
			Polyurethane HI-TECH	Ball	2.02250.95	3¾	2 13/32	1 1/4
	1 7/16"	300	Cast Iron	Sleeve	2.02250.12	3¾	2 13/32	2
3"	1¼"	150	Rubber HI-TECH	Plain	2.03350.42	4	2 21/32	2
		200	Polyurethane HI-TECH	Plain	2.03350.92	4	2 21/32	2
			Polyolefin	Delrin	2.03350.52	4	2 21/32	2
	1 15/32"	300	Phenolic	Roller	2.03350.309	4	2 21/32	2 3/4
3½"	1 5/16"	210	Performa Rubber (Conductive Round)	Ball	2.03250.565 COND	4 9/16	2 29/32	2
			Performa Rubber (Round tread)	Delrin	2.03250.561	4 9/16	2 29/32	2
			Performa Rubber (Round tread)	Ball	2.03250.565	4 9/16	2 29/32	2
	1¼"	225	Performa Rubber (Conductive Flat)	Ball	2.03250.445 COND	4 9/16	2 29/32	1 3/4
			Polyolefin	Delrin	2.03250.53	4 9/16	2 29/32	1 3/4
		230	Polyolefin	Delrin	2.03250.53	4 9/16	2 29/32	1 3/4
			Polyolefin	Ball	2.03250.55	4 9/16	2 29/32	1 3/4
		250	Performa Rubber (Flat tread)	Delrin	2.03250.441	4 9/16	2 29/32	1 3/4
			Performa Rubber (Flat tread)	Ball	2.03250.445	4 9/16	2 29/32	1 3/4
			Polyurethane HI-TECH	Delrin	2.03250.91	4 9/16	2 29/32	1 3/4
			Polyurethane HI-TECH	Ball	2.03250.95	4 9/16	2 29/32	1 3/4
			Thermo	Plain	2.03250.52 HT	4 9/16	2 29/32	2 3/4
			Cast Iron	Sleeve	2.03250.12	4 9/16	2 29/32	2 7/8
4"	1¼"	250	ThermoTech	Teflon	2.04250.613 H	5	3 7/32	3
			Performa Rubber (Conductive Flat)	Ball	2.04250.445 COND	5	3 7/32	2 1/8
		275	Polyolefin	Delrin	2.04250.53	5	3 7/32	2 1/8
			Polyolefin	Ball	2.04250.55	5	3 7/32	2 1/8
			Polyurethane HI-TECH	Delrin	2.04250.91	5	3 7/32	1 7/8
			Polyurethane HI-TECH	Ball	2.04250.95	5	3 7/32	1 7/8
		300	Performa Rubber (Flat tread)	Delrin	2.04250.441	5	3 7/32	2 1/8
			Performa Rubber (Flat tread)	Ball	2.04250.445	5	3 7/32	2 1/8
			Thermo	Plain	2.04250.52 HT	5	3 7/32	3 1/8
			Cast Iron	Sleeve	2.04250.12	5	3 7/32	3 1/8
5"	1¼"	250	ThermoTech	Teflon	2.05250.613 H	6 1/16	3 13/16	3
			Performa Rubber (Conductive Flat)	Ball	2.05250.445 COND	6 1/16	3 13/16	2 3/4
	1 5/16"	250	Performa Rubber (Conductive Round)	Ball	2.05250.565 COND	6 1/16	3 13/16	2 3/4
			Performa Rubber (Round tread)	Delrin	2.05250.561	6 1/16	3 13/16	2 3/4
			Performa Rubber (Round tread)	Ball	2.05250.565	6 1/16	3 13/16	2 3/4
	1¼"	300	Polyolefin	Delrin	2.05250.53	6 1/16	3 13/16	2 1/4
			Polyolefin	Ball	2.05250.55	6 1/16	3 13/16	2 1/4
			Polyurethane HI-TECH	Delrin	2.05250.91	6 1/16	3 13/16	2 1/4
			Polyurethane HI-TECH	Ball	2.05250.95	6 1/16	3 13/16	2 1/4
			Cast Iron	Sleeve	2.05250.12	6 1/16	3 13/16	3 1/2
		325	Performa Rubber (Flat tread)	Delrin	2.05250.441	6 1/16	3 13/16	2 1/2
			Performa Rubber (Flat tread)	Ball	2.05250.445	6 1/16	3 13/16	2 1/2
			Thermo	Plain	2.05250.52 HT	6 1/16	3 13/16	3 1/4

2 SERIES

2 SERIES

Capacity up to 325 lbs each

Top Plate Swivel & Rigid

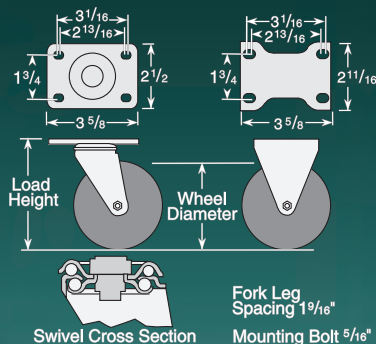


Standard Features


- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 3/8" hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Performance Options


Optional Top Plates



59 Top Plate (Swivel)
(Specify MTG59).



27 Top Plate (Swivel)
(Specify MTG27)



35 Top Plate (Swivel) (Specify MTG35)

Caster Brake

Total Lock Brake (See page 10)
Locks wheel and swivel simultaneously. Fits 3 1/2", 4" and 5" swivel models. Field installable (Specify BRK5).

Side Lock Brake (See page 10)
Available on all swivel models. Field installable (Specify BRK1).

Fork Option

NSF Listed (See page 1)
All models except thread guards and cast iron wheels (Specify FSI).

Swivel Dust Cap (See page 14)
Specify DC1.

Axle/Nut Options:

AX1 Zerk Axle
AX2 Solid Axle
NT1 Thick lock nut

Wheel Option

Thread Guards (See page 14)
Available on many models (Specify TG1 for metal TG2 for plastic).


Wheel Selection



PERFORMA
FLAT TREAD



PERFORMA
ROUND TREAD



PERFORMA
CONDUCTIVE FLAT



PERFORMA
CONDUCTIVE ROUND



POLYOLEFIN



THERMO



THERMOTECH



POLYURETHANE
HI-TECH



CAST IRON



RUBBER HI-TECH



PHENOLIC

2 SERIES • Top Plate Swivel & Rigid • Capacity up to 325 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Swivel Top Plate Caster Models	Rigid Top Plate Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2 1/2"	1 1/4"	125	Performa Rubber (Conductive Flat)	Ball	2.02256.445 COND	2.02208.445 COND	3 7/8	2 13/32	1 5/8
		140	Performa Rubber (Flat tread)	Delrin	2.02256.441	2.02208.441	3 7/8	2 13/32	1 5/8
			Performa Rubber (Flat tread)	Ball	2.02256.445	2.02208.445	3 7/8	2 13/32	1 5/8
		200	Polyolefin	Delrin	2.02256.53	2.02208.53	3 7/8	2 13/32	1 5/8
			Polyolefin	Ball	2.02256.55	2.02208.55	3 7/8	2 13/32	1 5/8
		250	Polyurethane HI-TECH	Delrin	2.02256.91	2.02208.91	3 7/8	2 13/32	1 5/8
			Polyurethane HI-TECH	Ball	2.02256.95	2.02208.95	3 7/8	2 13/32	1 5/8
	1 7/16"	300	Cast Iron	Sleeve	2.02256.12	2.02208.12	3 7/8	2 13/32	2
3"	1 1/4"	150	Rubber HI-TECH	Plain	2.03356.42	2.03308.42	4 1/8	2 21/32	2
		200	Polyurethane HI-TECH	Plain	2.03356.92	2.03308.92	4 1/8	2 21/32	2
			Polyolefin	Delrin	2.03356.52	2.03308.52	4 1/8	2 21/32	2
	1 15/32"	300	Phenolic	Roller	2.03356.309	2.03308.309	4 1/8	2 21/32	2 3/4
3 1/2"	1 5/16"	210	Performa Rubber (Conductive Round)	Ball	2.03256.565 COND	2.03208.565 COND	4 11/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Delrin	2.03256.561	2.03208.561	4 11/16	2 29/32	2 1/4
			Performa Rubber (Round tread)	Ball	2.03256.565	2.03208.565	4 11/16	2 29/32	2 1/4
	1 1/4"	225	Performa Rubber (Conductive Flat)	Ball	2.03256.445 COND	2.03208.445 COND	4 11/16	2 29/32	2
			Polyolefin	Delrin	2.03256.53	2.03208.53	4 11/16	2 29/32	1 7/8
		230	Polyolefin	Ball	2.03256.55	2.03208.55	4 11/16	2 29/32	1 7/8
			Performa Rubber (Flat tread)	Delrin	2.03256.441	2.03208.441	4 11/16	2 29/32	2
		250	Performa Rubber (Flat tread)	Ball	2.03256.445	2.03208.445	4 11/16	2 29/32	2
			Polyurethane HI-TECH	Delrin	2.03256.91	2.03208.91	4 11/16	2 29/32	1 7/8
			Polyurethane HI-TECH	Ball	2.03256.95	2.03208.95	4 11/16	2 29/32	1 7/8
			Thermo	Plain	2.03256.52 HT	2.03208.52 HT	4 11/16	2 29/32	2 7/8
		300	Cast Iron	Sleeve	2.03256.12	2.03208.12	4 11/16	2 29/32	3
4"	1 1/4"	250	ThermoTech	Teflon	2.04256.613 H	2.04208.613 H	5 1/8	3 7/32	3
			Performa Rubber (Conductive Flat)	Ball	2.04256.445 COND	2.04208.445 COND	5 1/8	3 7/32	2 1/4
		275	Polyolefin	Delrin	2.04256.53	2.04208.53	5 1/8	3 7/32	2 1/8
			Polyolefin	Ball	2.04256.55	2.04208.55	5 1/8	3 7/32	2 1/8
			Polyurethane HI-TECH	Delrin	2.04256.91	2.04208.91	5 1/8	3 7/32	2 1/8
			Polyurethane HI-TECH	Ball	2.04256.95	2.04208.95	5 1/8	3 7/32	2 1/8
		300	Performa Rubber (Flat tread)	Delrin	2.04256.441	2.04208.441	5 1/8	3 7/32	2 1/4
			Performa Rubber (Flat tread)	Ball	2.04256.445	2.04208.445	5 1/8	3 7/32	2 1/4
			Thermo	Plain	2.04256.52 HT	2.04208.52 HT	5 1/8	3 7/32	3 1/8
			Cast Iron	Sleeve	2.04256.12	2.04208.12	5 1/8	3 7/32	3 3/8
5"	1 1/4"	250	ThermoTech	Teflon	2.05256.613 H	2.05208.613 H	6 3/16	3 13/16	3
			Performa Rubber (Conductive Flat)	Ball	2.05256.445 COND	2.05208.445 COND	6 3/16	3 13/16	3
	1 5/16"	250	Performa Rubber (Conductive Round)	Ball	2.05256.565 COND	2.05208.565 COND	6 3/16	3 13/16	3
			Performa Rubber (Round tread)	Delrin	2.05256.561	2.05208.561	6 3/16	3 13/16	3
			Performa Rubber (Round tread)	Ball	2.05256.565	2.05208.565	6 3/16	3 13/16	3
			Polyolefin	Delrin	2.05256.53	2.05208.53	6 3/16	3 13/16	2 1/2
	1 1/4"	300	Polyolefin	Ball	2.05256.55	2.05208.55	6 3/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Delrin	2.05256.91	2.05208.91	6 3/16	3 13/16	2 1/2
			Polyurethane HI-TECH	Ball	2.05256.95	2.05208.95	6 3/16	3 13/16	2 1/2
			Cast Iron	Sleeve	2.05256.12	2.05208.12	6 3/16	3 13/16	3 3/4
		325	Performa Rubber (Flat tread)	Delrin	2.05256.441	2.05208.441	6 3/16	3 13/16	2 3/4
			Performa Rubber (Flat tread)	Ball	2.05256.445	2.05208.445	6 3/16	3 13/16	2 3/4
			Thermo	Plain	2.05256.52 HT	2.05208.52 HT	6 3/16	3 13/16	3 1/2

2 SERIES

2 SERIES


Capacity up to 325 lbs each

STAINLESS STEEL

Standard Features

- Polished 304 grade stainless steel finish handles the most punishing, corrosive conditions
- Double ball raceways for better performance and greater durability
- All component parts, including spanner bushing, axle and nut are stainless steel
- Designed to perform in the most hostile environments
- If rust is a problem...Colson stainless steel is the solution

Stainless Steel Top Plate Swivel & Rigid

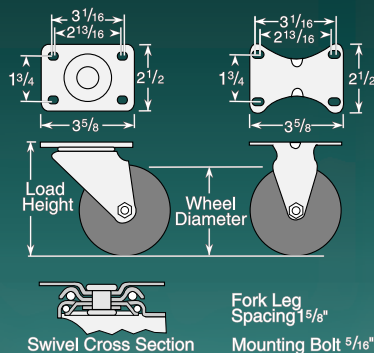

Performance Options

Caster Brake

Tech Lock (See page 11)
Available on all swivel models. Field installable (Specify **BRK2**).

Fork Option

NSF Listed (See page 1)
All models except thread guards and cast iron wheels (Specify **FSI**).



Wheel Option

Thread Guards (See page 14)
Available on many models (Specify **TG2** for plastic).

Wheel Selection



PERFORMA FLAT TREAD



PERFORMA ROUND TREAD



POLYOLEFIN



THERMOTECH



THERMO



POLYURETHANE HI-TECH


2 SERIES · Stainless Steel Top Plate Swivel & Rigid · Capacity up to 325 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Swivel Top Plate Caster Models	Rigid Top Plate Caster Models	Load Height	Swivel Radius	Weight (Pounds)
4"	1 1/4"	250	ThermoTech®	Teflon	2.04456.613H	2.04408.613H	5 1/8	35/16	3
		275	Polyolefin	Delrin	2.04456.544	2.04408.544	5 1/8	35/16	2 1/8
		275	Polyurethane HI-TECH	Delrin	2.04456.944	2.04408.944	5 1/8	35/16	2 1/8
		300	Performa Rubber (Flat Tread)	Delrin	2.04456.444	2.04408.444	5 1/8	35/16	2 1/4
		700	Thermo	Plain	2.04456.52HT	2.04408.52HT	5 1/8	35/16	2 1/4
5"	1 1/4"	250	ThermoTech®	Teflon	2.05456.613H	2.05408.613H	6 3/16	4 1/16	3
		300	Polyolefin	Delrin	2.05456.544	2.05408.544	6 3/16	4 1/16	2 5/8
		300	Polyurethane HI-TECH	Delrin	2.05456.944	2.05408.944	6 3/16	4 1/16	2 5/8
		325	Performa Rubber (Flat Tread)	Delrin	2.05456.444	2.05408.444	6 3/16	4 1/16	2 3/4
		325	Thermo	Plain	2.05456.52HT	2.05408.52HT	6 3/16	4 1/16	2 3/4
	1 5/16"	250	Performa Rubber (Round Grey Tread)	Delrin	2.05456.565	2.05408.565	6 3/16	4 1/16	2 3/4

2 SERIES

Capacity up to 325 lbs each

LoPro Top Plate Swivel & Rigid

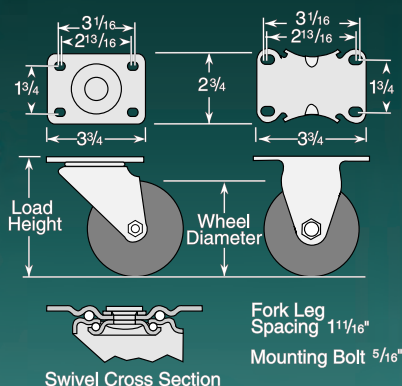

Standard Features

- Zinc plated finish is attractive and durable
- Heat treated full double ball hardened raceways
- Low profile design offers low load height and quick swivel response.
- Ideal for business machines, stock picking carts, warehouse dollies and housekeeping carts
- Thread guards standard on all models, but are not available with 3" brake option

Performance Options

Caster Brake

Side Lock (See page 7)

Easy to engage and disengage with a touch of the pedal (3" models only).

To order specify "BRK3".

Wheel Selection



CUSHION RUBBER



HARD RUBBER



POLYOLEFIN

2 SERIES • LoPro Top Plate Swivel & Rigid • Capacity up to 325 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Swivel Top Plate Caster Models	Rigid Top Plate Caster Models	Load Height	Swivel Radius	Weight (Pounds)
2 1/2"	1 1/8"	120	Cushion Rubber	Nylon*	2.02689.44	2.02688.44	3 5/16	2 3/8	1
		175	Hard Rubber	Nylon*	2.02689.54	2.02688.54	3 5/16	2 3/8	1
		175	Polyolefin	Nylon*	2.02689.52	2.02688.52	3 5/16	2 3/8	1
3"	1 1/4"	125	Cushion Rubber	Nylon*	2.03689.44	2.03688.44	3 13/16	2 11/16	1 1/2
		210	Hard Rubber	Nylon*	2.03689.54	2.03688.54	3 13/16	2 11/16	1 1/2
		210	Polyolefin	Nylon*	2.03689.52	2.03688.52	3 13/16	2 11/16	1 1/2

*Nylon bearing with powdered metal bushing.