**201-6UM**

- 6" rigid
- Anti-friction roller bearings
- Plexite phenolic wheel
- Standard top plate

**200-6UT**

- 6" swivel
- Anti-friction roller bearings
- Miratek polyurethane wheel
- Standard top plate

Wheels & Optional Extras:

Paythane
polyurethane bonded to
a metal center



Bronco Mold-On
rubber bonded to
aluminum center



Durakush
thermo-plastic
elastomer



**Payflex Soft
Rubber**
non-marking tread



Payron Semi-Steel
high tensile
sintered iron



Miratek
95 duro. red
polyurethane




Mirakush
85 duro. gray
polyurethane



**Payrock Hard
Rubber**
fibrous compound



Peejay
polyolefin plastic



**Plexite
Phenolic**
macerated canvas



Payvulk
mold-on rubber



V-groove
machine grooved
steel



Broncushion
60 duro. rubber



WK Brake
locks wheel, not used
with Thread Guards,
swivel only



**TG Thread
Guards**
cannot be used with
WK brakes



**WS Wheel
Seals**
locks out
foreign matter

**200/201**
MEDIUM HEAVYSANITARY
CASTERS

The 200 is a precision-built swivel caster with two perfectly aligned swivel raceways. All the cold-formed parts are made to exacting tolerances from heavy gauge steel and are hardened for severe service and long wear.

Applications:

For equipment in the range of 500 to 5000 lbs. A large selection of wheels makes it adaptable to a variety of industrial and institutional equipment. Widely used on warehouse trucks, refuse containers, linen carts, etc.

Engineering Data:


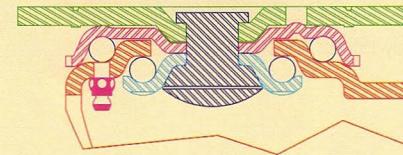
- .225 top plate.
- One-piece .187 wrap-around bracket staked to a .165 top cup.
- $\frac{5}{8}$ " hydraulically upset kingpin.
- .149 bottom cup.
- Case hardened.

Companion 201 Rigid:

.187 embossed legs welded to a .225 top plate.

Standard Features /Components:

- Zinc plated vibratory finish.
- Lubrication fittings for swivel and wheel.
- $\frac{1}{2}$ " nut and bolt axles.
- $\frac{3}{4} \times \frac{1}{2} \times 2\frac{5}{16}$ " hardened spanners.

Raceway Construction:

SK Brake
locks wheel & swivel
simultaneously.
Available: 3 1/2, 4, 5,
6" wheels only

Suffix-B as 200-6UK-L

Suffix-C as 200-6UK-C

200 SWIVEL & 201 RIGID SPECIFICATIONS

WHEEL SPECIFICATIONS				CATALOG NUMBER							
Diameter inches	Width inches	Type	Cap Each lbs	Swivel		Rigid		Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	Top Plate inches
				Plain, Ball, Oilite, Delrin Bearings	Roller Bearings	Plain, Ball, Oilite, Delrin Bearings	Roller Bearings				
4	2	Payron	700	200-40S	200-4US	201-40S	201-4US	6½	5	3½	5½
		Payflex	300	200-40X		201-40X					
		Payrock	450	200-40H		201-40H					
		Durakush	350	200-4BE	200-4UE	201-4BE	201-4UE				
		Bronco	350	200-4BV	200-4UV	201-4BV	201-4UV				
		Plexite	800	200-4DM	200-4UM	201-4DM	201-4UM				
		Mirakush	450	200-4DK	200-4UK	201-4DK	201-4UK				
		Miratek	500	200-4DT	200-4UT	201-4DT	201-4UT				
		Paythane	700		200-4UL		201-4UL	6			
		Peejay	450	200-4PJ	200-4UJ	201-4PJ	201-4UJ	4½			
		Payvulc	350		200-4UP		201-4UP	6½			
5	2	Payron	900	200-50S	200-5US	201-50S	201-5US	7½	5½	4½	6½
		Payflex	330	200-50X		201-50X					
		Payrock	450	200-50H		201-50H					
		Durakush	375	200-5BE	200-5UE	201-5BE	201-5UE				
		Bronco	400	200-5BV	200-5UV	201-5BV	201-5UV				
		Plexite	900	200-5DM	200-5UM	201-5DM	201-5UM				
		Mirakush	500	200-5DK	200-5UK	201-5DK	201-5UK				
		Miratek	700	200-5DT	200-5UT	201-5DT	201-5UT				
		Peejay	550	200-5PJ	200-5UJ	201-5PJ	201-5UJ	4½			
		Paythane	900		200-5UL		201-5UL	7			
		Payvulc	400		200-5UP		201-5UP				
6	2	Payron	1000	200-60S	200-6US	201-60S	201-6US	9	7	4½	7½
		Payflex	400	200-60X		201-60X					
		Payrock	560	200-60H		201-60H					
		Durakush	450	200-6BE	200-6UE	201-6BE	201-6UE				
		Bronco	450	200-6BV	200-6UV	201-6BV	201-6UV				
		Paythane	950		200-6UL		201-6UL				
		Plexite	1000	200-6DM	200-6UM	201-6DM	201-6UM				
		Mirakush	550	200-6DK	200-6UK	201-6DK	201-6UK				
		Miratek	820	200-6DT	200-6UT	201-6DT	201-6UT				
		Peejay	700	200-6PJ	200-6UJ	201-6PJ	201-6UJ				
		Payvulc	450		200-6UP		201-6UP	8			
		Broncusion	350	200-6BN	200-6UN	201-6BN	201-6UN				
		V-Groove	850		200-6USG		201-6USG	11			
8	2	Payron	1050	200-80S	200-8US	201-80S	201-8US	12½	8½	6½	9½
		Durakush	450	200-8BE	200-8UE	201-8BE	201-8UE				
		Bronco	500	200-8BV	200-8UV	201-8BV	201-8UV				
		Paythane	1000		200-8UL		201-8UL				
		Plexite	1050	200-8DM	200-8UM	201-8DM	201-8UM				
		Mirakush	700	200-8DK	200-8UK	201-8DK	201-8UK				
		Miratek	1000	200-8DT	200-8UT	201-8DT	201-8UT				
		Payvulc	500		200-8UP		201-8UP	10			
		Broncusion	450	200-8BN	200-8UN	201-8BN	201-8UN	9			
		V-Groove	1200		200-8USG		201-8USG	12			
		Peejay	750	200-8PJ	200-8UT	201-8PJ	201-8UJ	7			

• Weights shown represent swivels; Rigid casters weigh approximately 15% less.

Red = P.D.Q. (2 days or less)

Width by Length:
¾ x 4½
Bolt Hole Spacing:
2½ x 3½
slotted to
3 x 3Size of
Bolt Holes:
25/64