


tenn-a-flex

SPECIFICATIONS

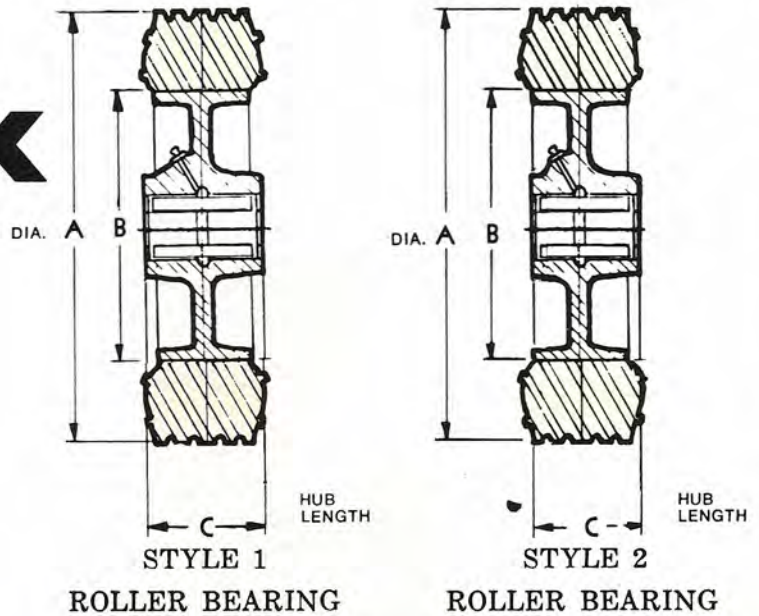

	TIRE SIZE	CATALOG NUMBER	ROLLER BEARINGS		UNIT WEIGHT	TIRE CAPACITY		DIMENSIONS			
								A	B	C	
1	6 × 2.00	TAF-0620 B-AL	5/8	3/4	3	300	Style 1	6	3	2 ³ / ₁₆	
2	8 × 2.50	TAF-0825 B-AL	5/8	3/4	6	500	Style 1	8	4 ¹ / ₄	2 ³ / ₁₆	
		TAF-0825 A-AL					Style 2	8	4 ¹ / ₄	1 ³ / ₄	
3	10 × 2.75	TAF-10272 C-AL	5/8	3/4	9	650	Style 1	10	6 ¹ / ₄	2	
		TAF-10275 B-AL					Style 2	10	6 ¹ / ₄	2 ³ / ₁₆	
4	10 × 2.75	TAF-10275 C-AL	7/8	1	10	650	Style 1	10	6 ¹ / ₄	2 ³ / ₄	
	12 × 2.75	TAF-12275 C-AL	7/8	1	13	750	Style 1	12	8	2 ³ / ₄	
	12 × 2.75	TAF-12275 C-AL	1 ¹ / ₈	1 ¹ / ₄	14	750	Style 1	12	8	2 ³ / ₄	
5	14 × 3.25	TAF-14325 D-AL	1	1 ¹ / ₈	1 ¹ / ₄	18	1000	Style 1	14	10	3 ¹ / ₄
6	16 × 4.00	TAF-1640 E-AL	1	1 ¹ / ₈	1 ¹ / ₄	28	1500	Style 1	16	11	4 ¹ / ₄

Items 4, 5, and 6 available with Taper Roller Bearings, Special Hub Lengths, Hub Caps, Special Machining. Send us a sketch or print of your requirements.

APPLICATIONS

Replace those worn out pneumatics and Semi-Pneumatics with Tenn-A-Flex.

Specify Tenn-A-Flex wheels on your new trucks.

Forget about the annoyance of punctures and collapsed tires.

APPLIANCE TRUCKS—The easy rolling and shock absorbing characteristics of TENN-A-FLEX wheels make them ideal for appliance trucks. A leading manufacturer of appliance trucks is now using TENN-A-FLEX wheels.

BOTTLERS TRUCKS—The rugged cast aluminum centers of these wheels eliminate the maintenance problems associated with broken hubs of conventional wheels.

INDUSTRIAL TRAILERS—Where protection of load, ease of handling, minimum maintenance and rugged service is required. The 16 x 4.00 is particularly adaptable for airports, warehouses, and factories. These wheels are not designed for highway use.

BAGGAGE WAGONS & AIRCRAFT GROUND SUPPORT CARTS—The cushioning effect and puncture proof characteristics of these wheels lend themselves to a wide variety of applications where these requirements are essential.